

Dimensions:



No. of contacts:	A	B	C	D
14	29.60	23.64	12.63	17.08
20	33.40	27.44	16.44	20.60

• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: 500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -25°C ~ +85°C

PART NO: B03-0XXF11EN-X L

No. OF CONTACTS: \_\_\_\_\_  
 14= 14P  
 20= 20P  
 PCB MOUNTING: \_\_\_\_\_  
 A:1.0mm(For PCB 1.2mm)  
 B:1.4mm(For PCB 1.6mm)

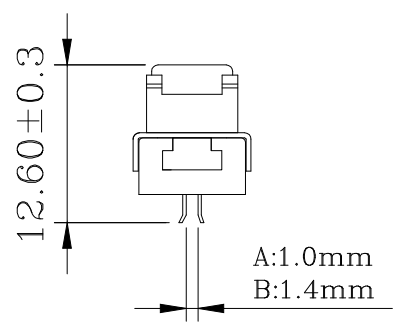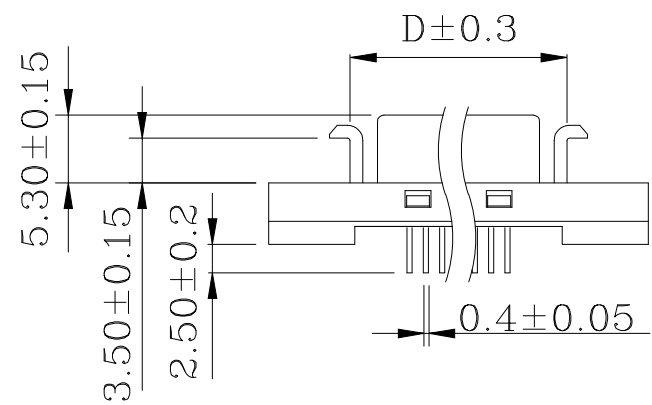

4	BRACKET	ZINC ALLOY	PLATING: Ni	
3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

△				QUALITY SYMBOLS
△				□:      ⊠:
△	2013/11/09新版发行		King Zhou	CRITICAL    MAJOR
SIDE	DATE	DESCRIPTION	APPROVER	▽:      ▽: ZERO DEFECT    S.P.C

Tolerance		NAME:	SCSI FEMALE夹板式 14, 20P (客户用图)			PART NO.	B03-0XXF11EN-X L		
x.	±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
.x	±0.50	SCALE:	N:1	DATE:	2013/11/09	JACK CHEN	DEAN FAN		B03-057
.xx	±0.30			<b>Lineconn</b> 东莞市林诚塑胶电子有限公司			<a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770		