
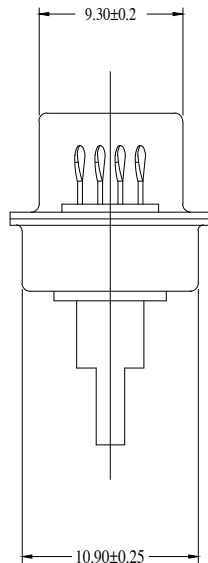


Voltage Current Rating: 1 AMP.
Dielectric Withstanding Voltage: 300V AC
 Insulation Resistance: 20MΩ Min.
 Temperature Range: -25°C to +85°C

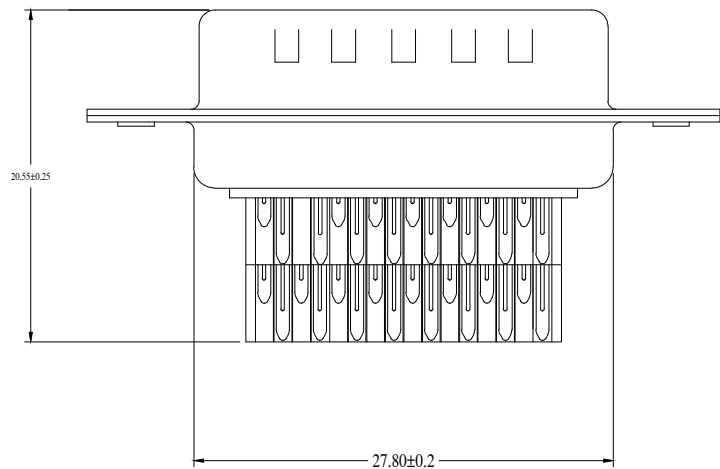

4	REAR SHELL	SPCC	PALTING: Sn	
3	FRONT SHELL	SPCC	PALTING: Ni	
2	HOUSING	PBT+30%GF	COLOR: Black	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

			QUALITY SYMBOLS
△	2019/07/06	依新料号编码修正料号	□: ☒:
△	2009/04/14	NEW ISSUE	CRITICAL MAJOR
SIDE	DATE	DESCRIPTION	APPROVER
			Jack Chen
			JINGLI
			APPROVER

Tolerance		NAME:	LFH 60P MALE 焊线式通孔 (客户用图)			PART NO.	B04-060311AN-01	
x.	±0.50	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY
.x	±0.30	SCALE:	N:1	DATE:	2009/04/14	JINGLI	KING ZHOU	B04-014
.xx	±0.25							


东莞市林诚塑胶电子有限公司
<http://www.lineconn.com>
 TEL: 0769-85181660 85181770

