
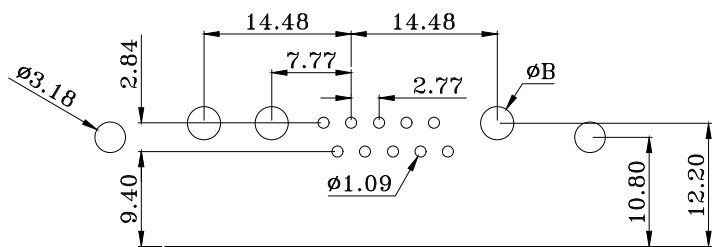


High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25°C to +85°C

PART NO:
B08-AW35X14D-X1

HOUSING COLOR:
1:BLACK
3:GREEN
5:WHITE

CURRENT RATING:
A = 10 AMPS Dim.A ϕ 1.7 Dim.B ϕ 2.2
B = 20 AMPS Dim.A ϕ 2.8 Dim.B ϕ 3.3
C = 30 AMPS Dim.A ϕ 3.2 Dim.B ϕ 3.7
D = 40 AMPS Dim.A ϕ 3.7 Dim.B ϕ 4.2

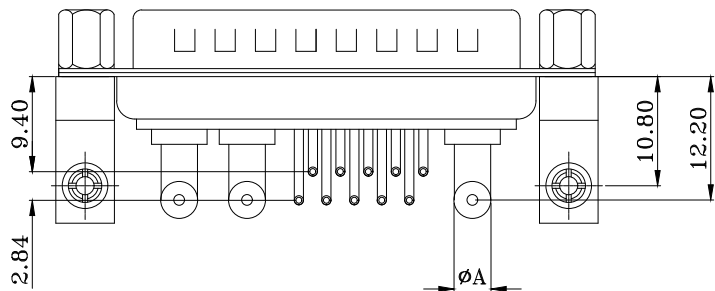

PCB LAYOUT


6	JACKSCREWS	BRASS	PLATING: Ni	
5	HOUSING	PBT+30%GF	COLOR: WHITE	
4	RIVETED INSERT	BRASS	PLATING: Ni	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ◊:
ZERO DEFECTS.P.C

Tolerance

x. ±0.50
.x ±0.30
.xx ±0.25



NAME:	13W3 90度公头柳支架鱼叉锁螺丝 POWER D-SUB (客户用图)				PART NO.	B08-AW35114D-X1			
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
SCALE:	N:1	DATE:	2017/05/13	JINGLI	KING ZHOU		B08-045		

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770

△	2017/05/13	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

A