





Termination Cover
(1 Places)

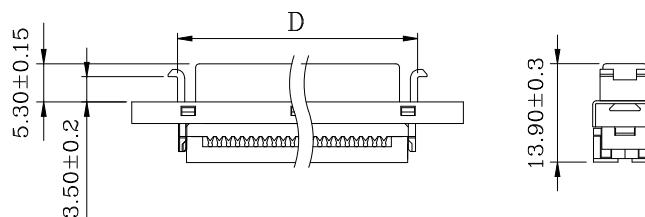

Wire Holder
(2 Places)

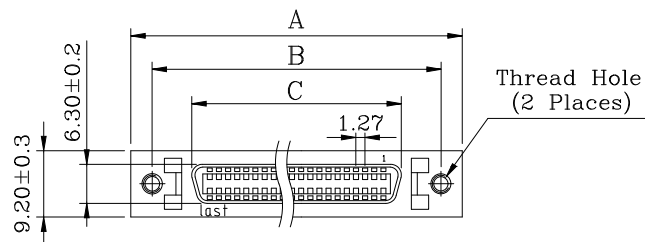

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO: B03-0XX211EB-X X

No.OF CONTACTS:
20= 20P
40= 40P
100= 100P

WIRE HOLDER:
28AWG or 30AWG WIRE
6= 0.62mm
7= 0.75mm
9= 0.90mm

BRACKET FINISHES:
L:LATCH BRACKET
S:SCREW BRACKET

Dimensions:


No.of contacts:	A	B	C	D	E
20	33.35	27.45	16.44	20.63	20.10
40	46.10	40.15	29.15	33.30	32.95
100	84.20	78.25	67.15	71.50	71.05

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
5	BRACKET	SPCC	PLATING:Ni	
4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance
x. ±0.50
.x ±0.30
.xx ±0.25



NAME: SCSI FEMALE IDC刺破式20, 40, 100P (客户用图)
PART NO. B03-0XX211EB-XX
REV: A UNIT: mm DRW BY: Jack Chen CHK BY: Dean Fan APP BY: DRAWING NO. B03-041
SCALE: N:1 DATE: 2011/07/13

lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com
TEL: 0769-85181660 85181770

△	2011/07/13	NEW ISSUE	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER