
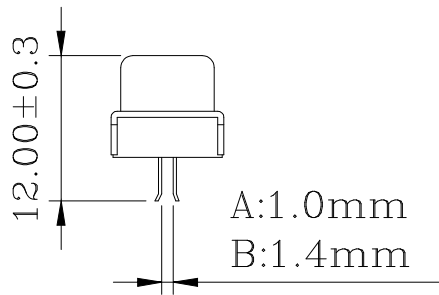


Dimensions:

No. of contacts:	A	B	C
14	16.45	12.80	8.60
20	20.00	16.60	9.50
26	24.00	20.40	9.50
36	30.40	26.70	8.60
40	32.95	29.25	9.30
50	39.30	35.60	9.50
68	50.80	46.95	9.30
100	71.05	67.29	9.30

• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: 500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -25°C ~ +85°C

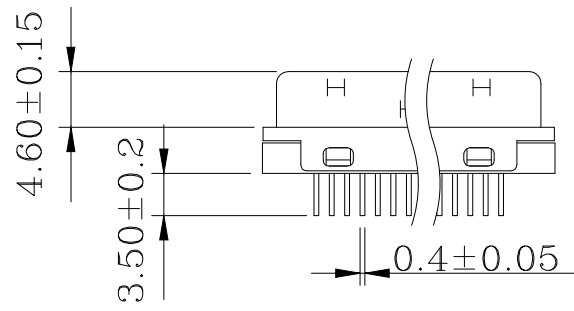

PART NO:

B03-0XXG11EN-X1

No. OF CONTACTS:

14= 14P

20= 20P

>

100=100P

PCB MOUNTING:

A:1.0mm(For PCB 1.2mm)

B:1.4mm(For PCB 1.6mm)

3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK
2	SHELL	SPCC	PLATING: Ni
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni
ITEM	DESC.	MATERIAL	REMAKS

△			
△			
△	2013/10/23	新版发行	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS  
 □: CRITICAL MAJOR  
 ▽: ZERO DEFECT S.P.C

Tolerance		NAME:	
x.	±0.80	SCSI MALE夹板组装式	
.x	±0.50	(客户用图)	
.xx	±0.30	REV: A	UNIT: mm
		SCALE: N:1	DATE: 2013/10/23

PART NO.				REMAKS			PART REMAKS	
B03-0XXG11EN-X1								
REV:	A	UNIT:	mm	DRW BY:	CHK BY:	APP BY:	DRAWING NO.	
SCALE:	N:1	DATE:	2013/10/23	JACK CHEN	DEAN FAN		B03-056	
东莞市林诚塑胶电子有限公司				<a href="http://www.lineconn.com">http://www.lineconn.com</a>			TEL:0769-85181660 85181770	
8	7	6	5	4	3	2	1	