






Termination Cover
(1 Places)

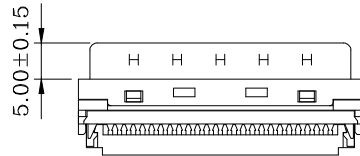

Wire Holder
(2 Places)

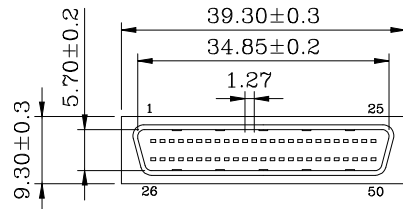

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Operation Temperature: -25°C ~ +85°C

PART NO: B02-050111E0-X0

WIRE HOLDER: _____
 28AWG or 30AWG WIRE
 6= 0.62mm
 7= 0.75mm
 9= 0.90mm

4	COVER	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK	
3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

△				QUALITY SYMBOLS
△				□: ☒:
△	2010/01/09 新版发行		King Zhou	CRITICAL MAJOR
SIDE	DATE	DESCRIPTION	APPROVER	▽: ▽: ZERO DEFECT S.P.C

Tolerance		NAME: SCSII PIN TYPE 50P MALE IDC刺破式 ASSEMBLY CONN. (客户用图)				PART NO. B02-050111E0-X0	
x.	±0.80	REV:	A	UNIT:	mm	DRW BY:	JACK CHEN
.x	±0.50	SCALE:	N:1	DATE:	2010/01/09	CHK BY:	DEAN FAN
.xx	±0.30	DRAWING NO. B02-042					
		东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770	

8

7

6

5

4

3

2

1

F

F

E

E

D

D

C

C

B

B

A

A

8

7

6

5

4

3

2

1