

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

PART NO: B02-0XX211E0-X1


No.OF CONTACTS:
 26= 26P
 36= 36P
 50= 50P
 68= 68P

WIRE HOLDER:
 28AWG or 30AWG WIRE
 6= 0.62mm
 7= 0.75mm
 9= 0.90mm

Dimensions:

No.of contacts:	A	B	C	D
26	24.00	19.46	9.30	14.40
36	30.40	25.80	8.40	14.40
50	39.20	34.70	9.30	15.60
68	50.70	46.20	9.30	14.40

4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMAKS

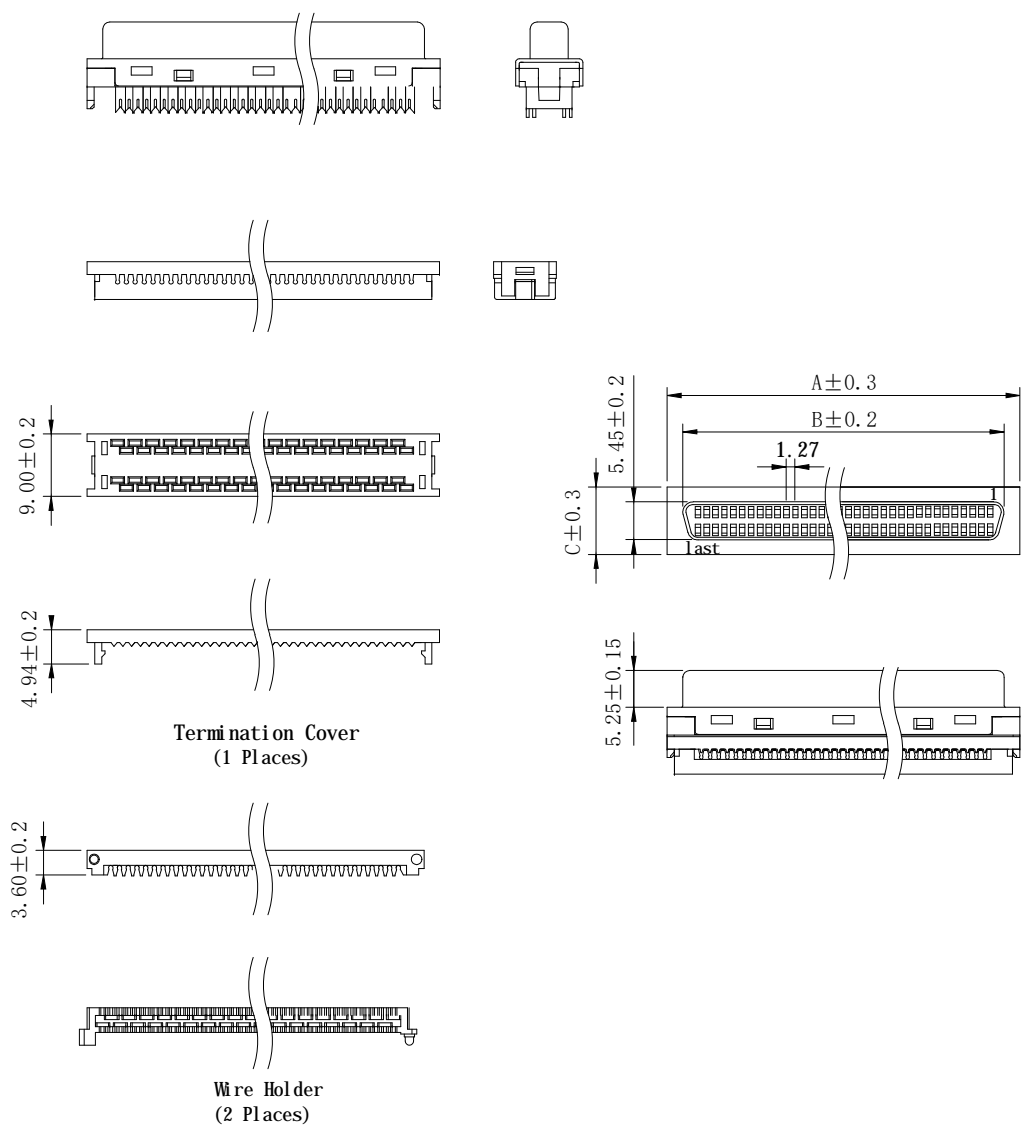

△	2011/06/09	NEW ISSUE	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance		NAME: SCSTI PIN TYPE FEMALE IDC刺破装配式主体 (客户用图)			PART NO. B02-0XX211E0-X1				
□:	☒:	x.	±0.50	REV:	A	UNIT:	mm	DRW BY:	CHK BY:	APP BY:	DRAWING NO.
CRITICAL	MAJOR	.x	±0.30	SCALE:	N:1	DATE:	2011/07/15	Jack Chen	Dean Fan		B02-022
▽:	▽:	.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL: 0769-85181660 85181770				
ZERO DEFECT	S.P.C			4		3		2		1	