No.of Contact	A	B	C	D	E	F
15	16.9	25.0	30.8	2.29	0.25	0.89
26	25.2	33.3	39.1	2.29	0.51	0.64
44	39.0	47.0	53.0	2.29	0.51	0.64
62	55.4	63.5	69.3	2.41	0.58	0.62

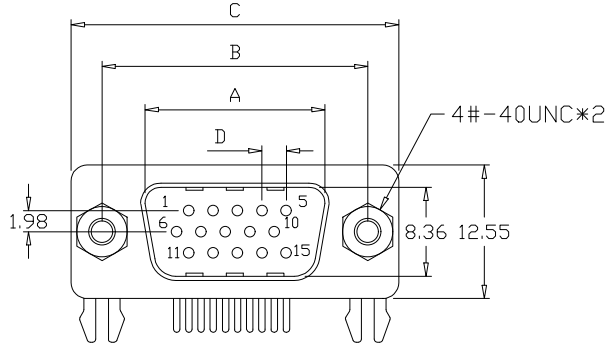

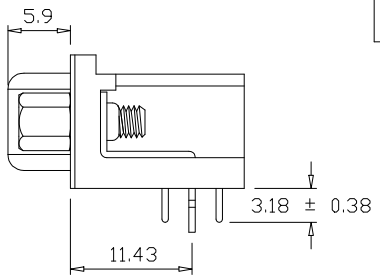

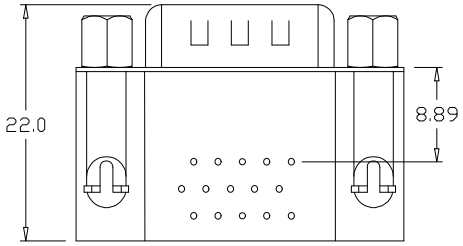

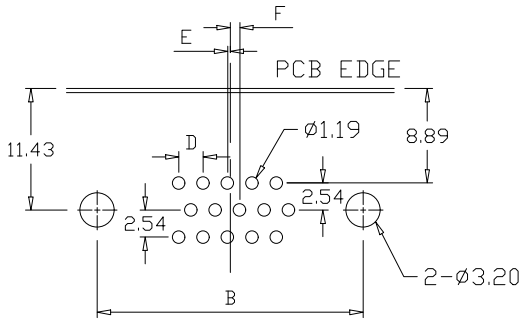

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:1000V AC
Insulation Resistance:1000MΩ Min.
Temperature Range:-25℃ to +85℃

PART NO:
B04-0XX511AD-F4

NO.OF CONTACT:
15 = 15 pos
26 = 26 pos
37 = 37 pos
62 = 62 pos

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
6	RIVET	COPPER ALLOY	PALTING:Ni	
5	SCREW	STEEL	PALTING:Ni	
4	BOARDLOCK	COPPER ALLOY	PALTING:Ni	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PALTING:Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:G/F SOLDER AREA:Sn UNDER-PLATING:Ni	

SIDE	DATE	DESCRIPTION	APPROVER
A	2011/03/07	NEW ISSUE	JINGLI

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECTS ▽: S.P.C

Toleance
x. ±0.50
.x ±0.30
.xx ±0.25

NAME:	HD.D-SUB MALE 90度DIP 8.89mm前锁4.8mm螺母(客户用图)	PART NO.	B04-0XX511AD-F4

REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2011/03/07	JINGLI	KING ZHOU		B04-024

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769-85181660 85181770