




8 7 6 5 4 3 2 1

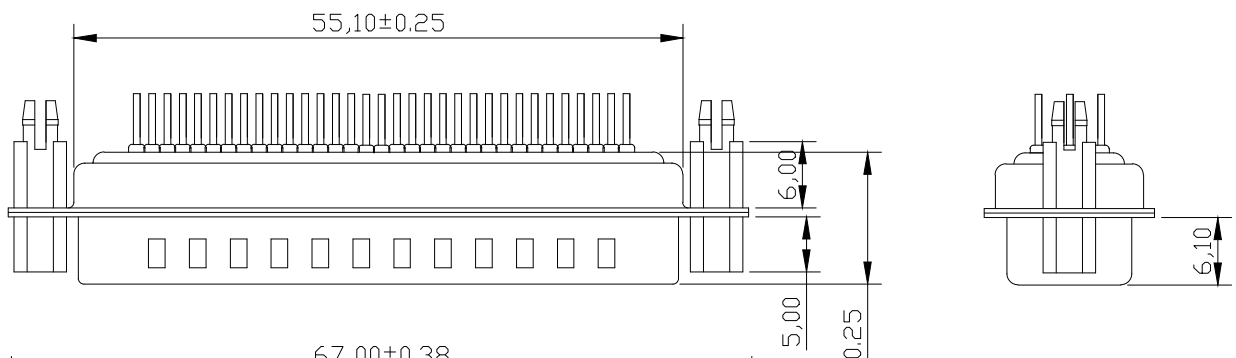

Voltage Current Rating:5 AMP.
 Dielectric Withstanding Voltage:1000V AC
 Insulation Resistance:1000MΩ Min.
 Temperature Range:-25℃ to +85℃

PART NO:
 B05-0507X1AD-E5

HOUSING COLOR:
 1 = BLACK
 5 = WHITE
 6 = BLUE

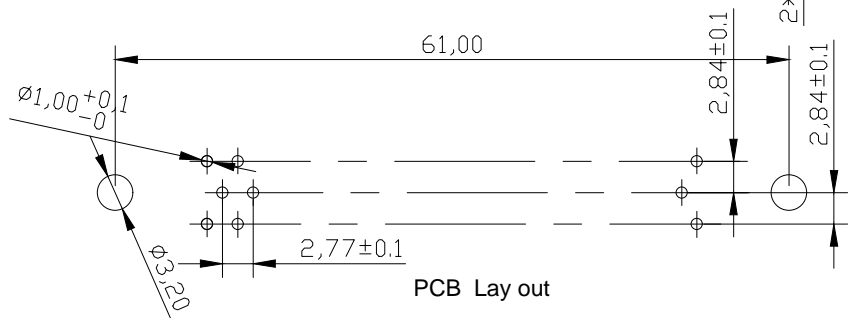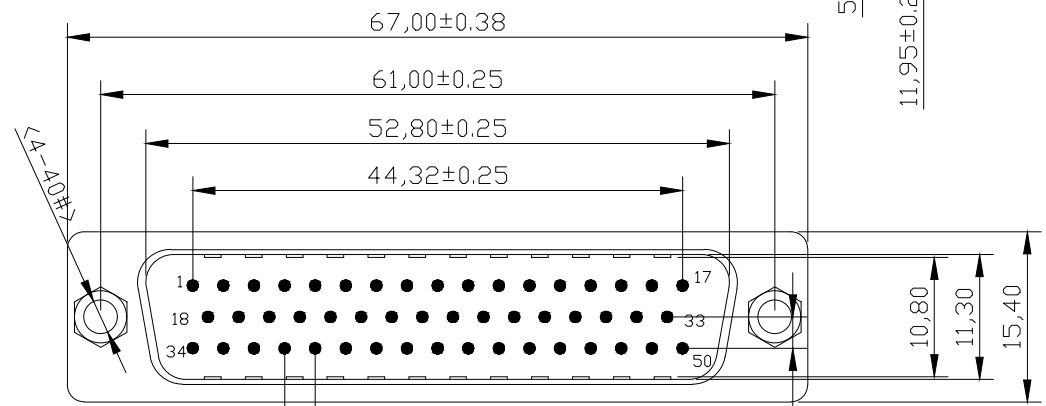

6	SCREW	STEEL	PALTING: Ni	
5	BOARDLOCK	COPPER ALLOY	PALTING: Ni	
4	HOUSING	PBT+30%GF	COLOR: SEE PART NO.	
3	REAR SHELL	SPCC	PALTING: Sn	
2	FRONT SHELL	SPCC	PALTING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

				QUALITY SYMBOLS	Tolerance	NAME:	D-SUB 50P MALE 180度后铆6.0鱼叉 前锁5.0mm螺母 (客户用图)			PART NO.	B05-0507X1AD-E5		
				□: ☒:	.x ±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	.x ±0.30	SCALE:	N:1	DATE:	2014/09/02	JINGLI	KING ZHOU		B05-092
				▽: ▽:	.xx ±0.25								
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECTS.P.C		Lineconn 东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL: 0769-85181660 85181770				

8 7 6 5 4 3 2 1