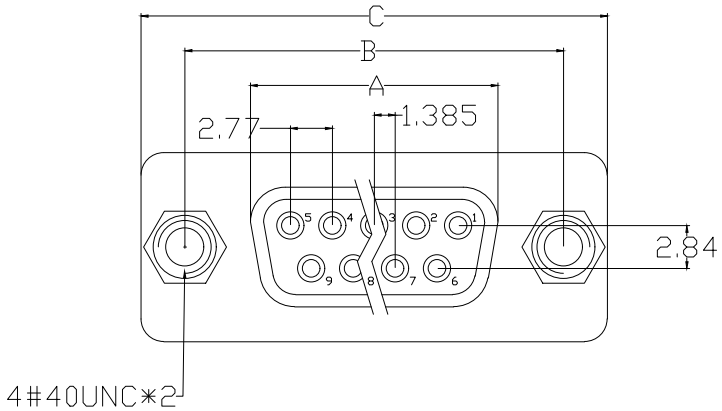

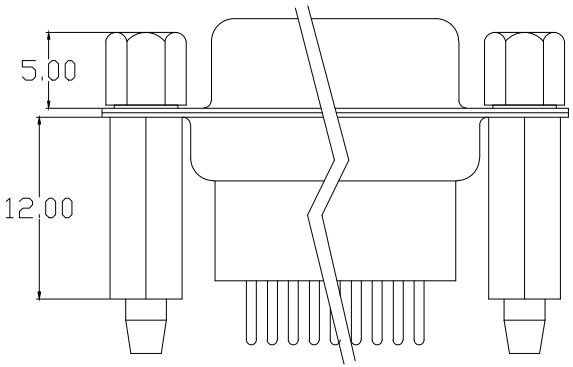

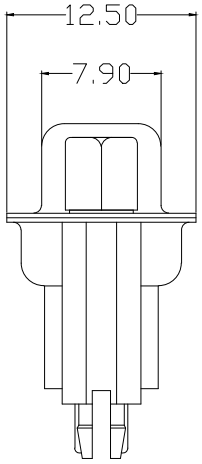

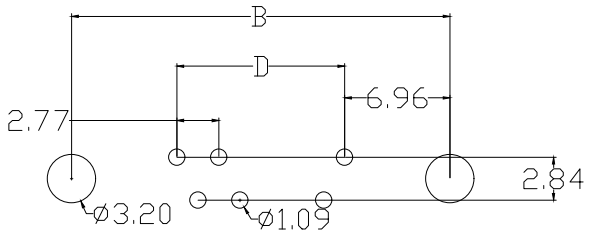

P.C.B LAYOUT

No.of Contact	A	B	C	D
09	16.2	25.0	30.8	11.08
15	24.8	33.3	39.2	19.39
25	38.3	47.0	53.0	33.24
37	54.8	63.5	69.4	49.86

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:1000V AC
Insulation Resistance:1000MΩ Min.
Temperature Range:−25℃ to +85℃

PART NO:
B05−0XX8X1AD−H5

NO.OF CONTACT:
09 = 9 pos
15 = 15 pos
25 = 25 pos
37 = 37 pos

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
6	SCREW	STEEL	PALTING: Ni	
5	BOARDLOCK	COPPER ALLOY	PALTING: Ni	
4	HOUSING	PBT+30%GF	COLOR: BLACK	
3	REAR SHELL	SPCC	PALTING: Sn	
2	FRONT SHELL	SPCC	PALTING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER-PLATING: Ni	

SIDE	DATE	DESCRIPTION	APPROVER
⚠	2018/05/30	NEW ISSUE	JINGLI

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance
x. ±0.50
.x ±0.30
.xx ±0.25

NAME: D-SUB FEMALE 180度后铆12.0鱼叉前锁5.0mm螺母 (客户用图)
PART NO. B05−0XX8X1AD−H5
REV: A | UNIT: mm | DRW BY | CHK BY | APP BY | DRAWING NO.
SCALE: N:1 | DATE: 2018/05/30 | JINGLI | KING ZHOU | B05−093

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769−85181660 85181770