RoHS COMPLIANT

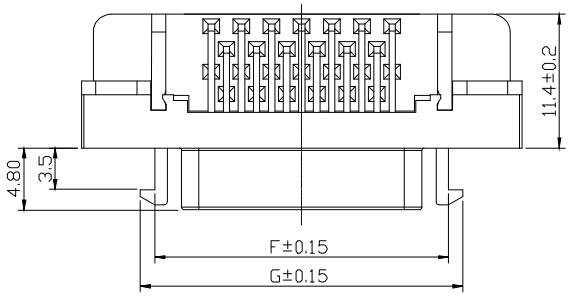

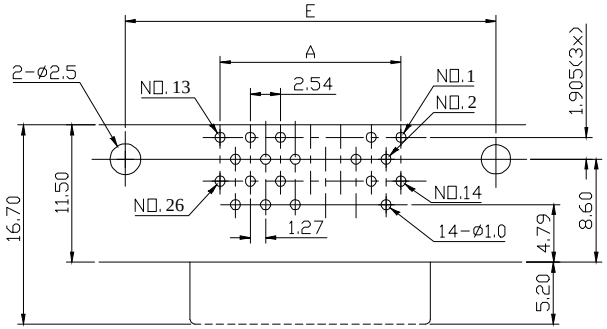

PCB LAYOUT

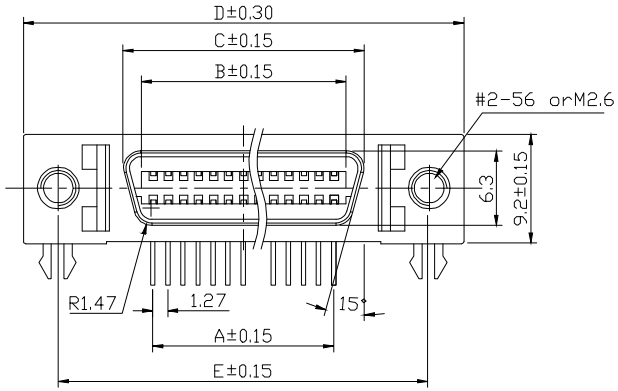



NO.OF PIN	DIME NSIONS						
	A	B	C	D	E	F	G
14	7.62	9.52	12.60	29.51	23.64	17.25	19.58
26	15.24	17.24	20.24	37.13	31.26	24.76	27.20
50	30.48	32.29	35.39	52.37	46.50	40.00	42.20

Voltage Current Rating:1 AMP.30V AC
Dielectric Withstanding Voltage:500V AC
Contact Resistance:35 mΩ Max.
Insulation Resistance:500MΩ Min.
Temperature Range:−20℃ to +85℃

PART NO.:
B03−0XX618A7−02
NO.OF PIN:
14: 14P
26: 26P
50: 50P

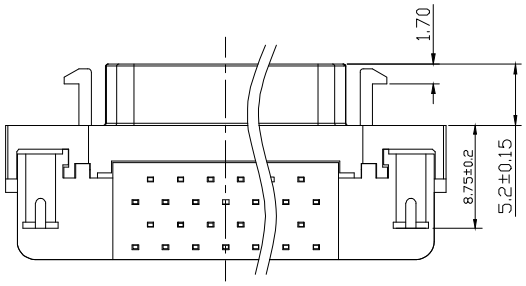

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
5	BRACKET	STEEL	PLATING: Ni	
4	COVER	PBT+30%GF	COLOR: BLACK	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	ZINC ALLOY	PLATING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER−PLATING: Ni	

SIDE	DATE	DESCRIPTION	APPROVER
3			
2			
1	2018/11/09	新版发行	King Zhou

QUALITY SYMBOLS
□: CRITICAL ☒: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance	
x.	±0.80
.x	±0.50
.xx	±0.25

NAME:	SCSI FEMALE 90度DIP 锌合金壳 TYPE II 14, 26, 50P (客户用图)	PART NO.	B03−0XX618A7−02

REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/11/09	DAWN HU	KING ZHOU		B03−084

Lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769−85181660 85181770