


High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25°C to +85°C

PART NO:

B08-AW331140-X1

Current Rating:

- A = 10 AMPS Dim.A Ø1.7
- B = 20 AMPS Dim.A Ø2.8
- C = 30 AMPS Dim.A Ø3.2
- D = 40 AMPS Dim.A Ø4.6

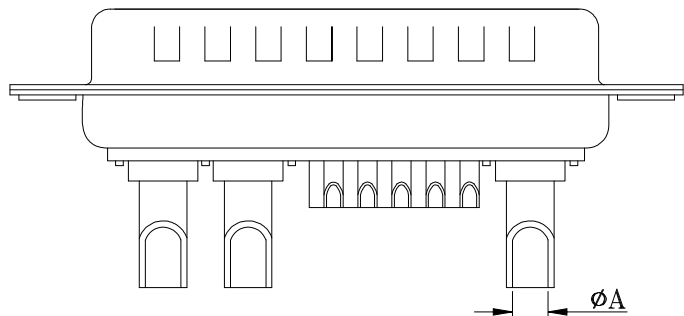

4	HOUSING	PBT+30%GF	COLOR:BLACK	
3	REAR SHELL	SPCC	PLATING:Sn	
2	FRONT SHELL	SPCC	PLATING:Ni	
1	TERMINAL	BRASS	TERMINAL FINISH:FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS

- : ☒: CRITICAL MAJOR
- ▽: ▽: ZERO DEFECT S.P.C

Tolerance

- .x ±0.50
- .x ±0.30
- .xx ±0.25

NAME:

13W3公头焊线式光孔 POWER D-SUB (客户用图)

REV: A

UNIT: mm

DRW BY: JINGLI

CHK BY: KING ZHOU

PART NO: B08-AW331140-X1


SCALE: N:1

DATE: 2012/04/22

JINGLI

KING ZHOU

APP BY: DRAWING NO: B08-003



Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

△

SIDE

2012/04/22

8

NEW ISSUE

DESCRIPTION

7

JINGLI

APPROVER

6

QUALITY SYMBOLS

- : ☒: CRITICAL MAJOR
- ▽: ▽: ZERO DEFECT S.P.C

Tolerance

- .x ±0.50
- .x ±0.30
- .xx ±0.25

NAME:

13W3公头焊线式光孔 POWER D-SUB (客户用图)

REV: A

UNIT: mm

DRW BY: JINGLI

CHK BY: KING ZHOU

PART NO: B08-AW331140-X1


SCALE: N:1

DATE: 2012/04/22

JINGLI

KING ZHOU

APP BY: DRAWING NO: B08-003



Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

4

3

2

1