


High Power Contact Current Rating:  
10,20 or 40AMPS  
High Power Contact Resistance:  
2.7 Milliohms Max.  
Dielectric Withstanding Voltage:  
1000V AC For 1 Minute  
Insulation Resistance:5000MΩ Min.  
Temperature Range:-25°C to +85°C

PART NO:

B08-8W841140-X1

Current Rating:

- A = 10 AMPS Dim.A  $\phi$ 1.7
- B = 20 AMPS Dim.A  $\phi$ 2.8
- C = 30 AMPS Dim.A  $\phi$ 3.2
- D = 40 AMPS Dim.A  $\phi$ 4.6

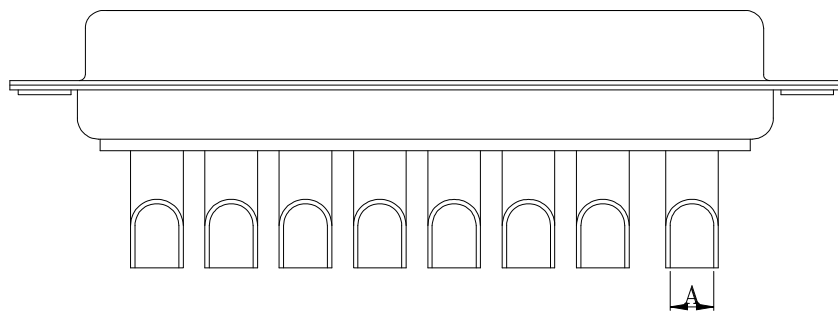

4	HOUSING	PBT+30%GF	COLOR:BLACK	
3	REAR SHELL	SPCC	PLATING:Sn	
2	FRONT SHELL	SPCC	PLATING:Ni	
1	TERMINAL	BRASS	TERMINAL FINISH:FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS

- :      ☒:      CRITICAL      MAJOR
- ▽:      ▽:      ZERO DEFECT      S.P.C

Tolerance

- .x      ±0.50
- .x      ±0.30
- .xx     ±0.25

NAME:

8W8母头牌线式光孔 POWER D-SUB (客户用图)

PART NO.

B08-8W841140-X1

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1


DATE:

2015/01/06

JINGLI

KING ZHOU

B08-020



lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com  
TEL:0769-85181660 85181770

NEW ISSUE

JINGLI

SIDE

DATE

DESCRIPTION

APPROVER

ZERO DEFECT

S.P.C

8

7

6

5

4

3

2

1