


High Power Contact Current Rating:  
10,20 or 40AMPS  
High Power Contact Resistance:  
2.7 Milliohms Max.  
Dielectric Withstanding Voltage:  
1000V AC For 1 Minute  
Insulation Resistance:5000MΩ Min.  
Temperature Range:-25°C to +85°C

PART NO:  
B08-AW541140-X1

Current Rating:  
A = 10 AMPS Dim.A Ø1.7  
B = 20 AMPS Dim.A Ø2.8  
C = 30 AMPS Dim.A Ø3.2  
D = 40 AMPS Dim.A Ø4.6

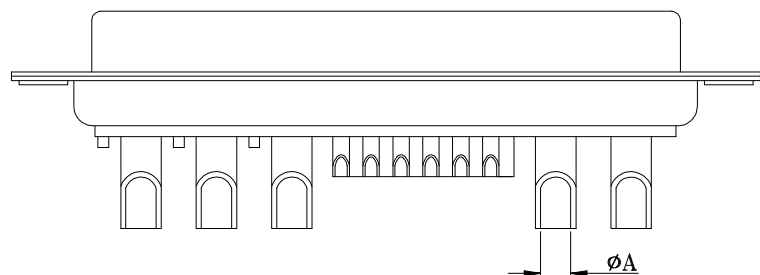

4	HOUSING	PBT+30%GF	COLOR:BLACK	
3	REAR SHELL	SPCC	PLATING:Sn	
2	FRONT SHELL	SPCC	PLATING:Ni	
1	TERMINAL	BRASS	TERMINAL FINISH:FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS		Tolerance		NAME: 17W5母头焊线式光孔 POWER D-SUB (客户用图)				PART NO. B08-AW541140-X1			
□:	☒:	x.	±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
CRITICAL	MAJOR	.x	±0.30	SCALE:	N:1	DATE:	2015/01/06	JINGLI	KING ZHOU		B08-024
∇:	∇:	.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com		TEL:0769-85181660 85181770			
ZERO DEFECT	S.P.C										

△	2015/01/06	NEW ISSUE	JINGLI	
SIDE	DATE	DESCRIPTION	APPROVER	