


High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25°C to +85°C

PART NO:

B08-AW531140-X1

Current Rating:

- A = 10 AMPS Dim.A ϕ 1.7
- B = 20 AMPS Dim.A ϕ 2.8
- C = 30 AMPS Dim.A ϕ 3.2
- D = 40 AMPS Dim.A ϕ 4.6

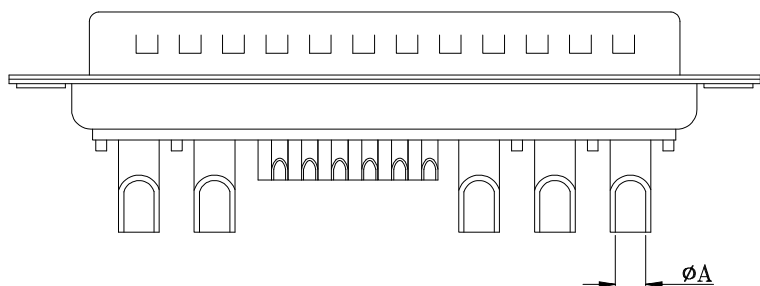

4	HOUSING	PBT+30%GF	COLOR: BLACK	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

- \square : CRITICAL
- \boxtimes : MAJOR
- ∇ : ZERO DEFECT
- ∇ : S.P.C

Tolerance

- .x \pm 0.50
- .x \pm 0.30
- .xx \pm 0.25

NAME:

17W5公头焊线式光孔 POWER D-SUB (客户用图)

PART NO.

B08-AW531140-X1

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1


DATE:

2015/01/06

JINGLI

KING ZHOU

B08-023



Lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770

\triangle	2015/01/06	NEW ISSUE	JINGLI	
SIDE	DATE	DESCRIPTION	APPROVER	