


High Power Contact Current Rating:  
10,20 or 40AMPS  
High Power Contact Resistance:  
2.7 Milliohms Max.  
Dielectric Withstanding Voltage:  
1000V AC For 1 Minute  
Insulation Resistance:5000MΩ Min.  
Temperature Range:-25°C to +85°C

PART NO:

B09-2V241140-X1

Current Rating: \_\_\_\_\_

- A = 10 AMPS Dim.A Ø1.7
- B = 20 AMPS Dim.A Ø2.8
- C = 30 AMPS Dim.A Ø3.2
- D = 40 AMPS Dim.A Ø4.6

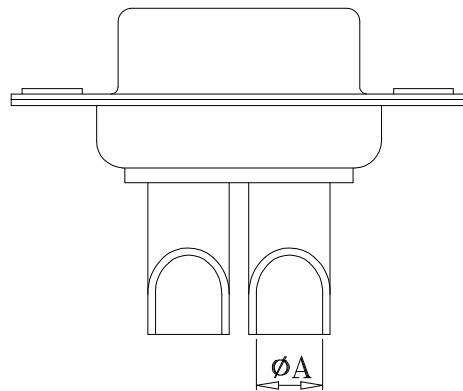

4	HOUSING	PBT+30%GF	COLOR: BLACK	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

- :    ☒ :  
CRITICAL    MAJOR
- ▽ :    ▽ :  
ZERO DEFECT    S.P.C

Tolerance

- .x    ±0.50
- .x    ±0.30
- .xx   ±0.25

NAME:

2V2母头焊线式光孔 POWER D-SUB (客户用图)

PART NO.

B09-2V241140-X1

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2012/09/26

JINGLI

KING ZHOU

B09-002

Lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL:0769-85181660 85181770

△	2012/09/26	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER