


High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25°C to +85°C

PART NO:
B08-BW441140-X1

Current Rating: _____
A = 10 AMPS Dim.A ϕ 1.7
B = 20 AMPS Dim.A ϕ 2.8
C = 30 AMPS Dim.A ϕ 3.2
D = 40 AMPS Dim.A ϕ 4.6

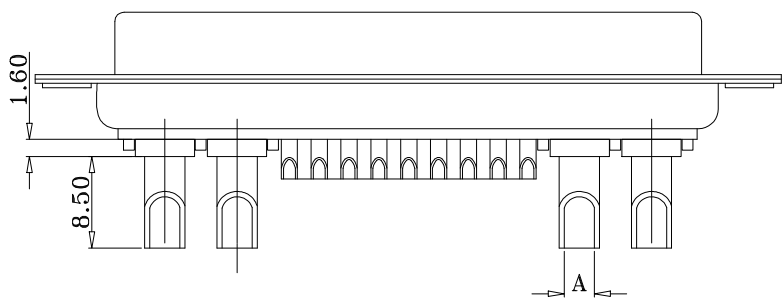

4	HOUSING	PBT+30%GF	COLOR: BLACK	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

			QUALITY SYMBOLS
			□: ☒: x: ±0.50
			CRITICAL MAJOR .x ±0.30
			∇: ∇: .xx ±0.25
			ZERO DEFECT S.P.C
△	2015/01/06	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER

Tolerance		NAME: 21W4母头焊线式光孔 POWER D-SUB (客户用图)		PART NO.	B08-BW441140-X1				
.x	±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
.x	±0.30	SCALE:	N:1	DATE:	2015/01/06	JINGLI	KING ZHOU		B08-022
.xx	±0.25	Lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com		TEL:0769-85181660 85181770			

8 7 6 5 4 3 2 1

F

F

E

E

D

D

C

C

B

B

A

A

8 7 6 5 4 3 2 1