


Voltage Current Rating: 5 AMP.
 Dielectric Withstanding Voltage: 1000V AC
 Insulation Resistance: 5000MΩ Min.
 Temperature Range: -25°C to +85°C

PART NO:
 B04-0785X14D-02

HOUSING COLOR:
 1 = BLACK
 5 = WHITE
 6 = BLUE

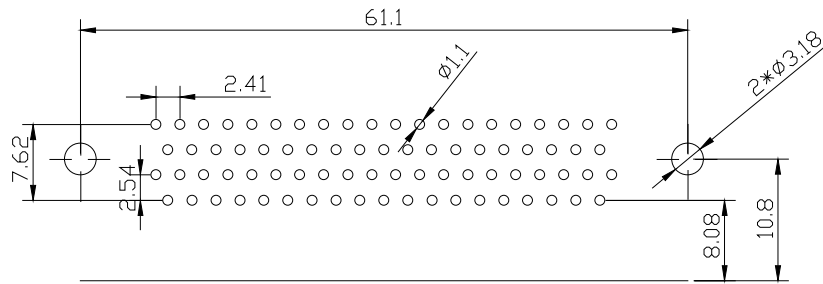

PCB Layout

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
5	JACKSCREWS	BRASS	PLATING: Ni	
4	HOUSING	PBT+30%GF	COLOR: WHITE	
3	RIVETED INSERT	BRASS	PLATING: Ni	
2	SHELL	STEEL	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR
 ▽: ▽: ZERO DEFECT S.P.C

Tolerance

x. ±0.50
 .x ±0.30
 .xx ±0.25

NAME:	HD.D-SUB 78P 车针公头90度插板8.08折弯铆支 (客户用图)				PART NO.	B04-0785X14D-02		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2013/08/11	JINGLI	KING ZHOU		B04-012	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL: 0769-85181660 85181770

△	2013/08/11	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

A

A

F

F

E

E

D

D

C

C

B

B

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1