



RoHS

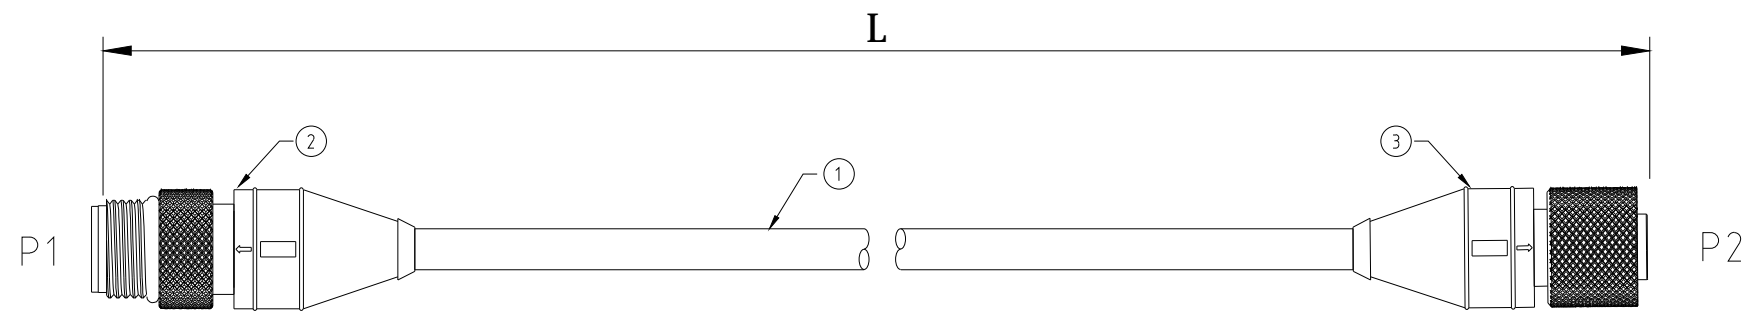

PIN ASSIGNMENT

P1	WIRE COLOR	P2
1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5



NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

5	OUTSIDE MLD	PVC 45P BLACK	NA
4	INTERNAL MLD	PE	NA
3	CONN	M12 5P母 A扣焊线式带屏蔽	1SET
2	CONN	M12 5P公 A扣焊线式带屏蔽	1SET
1	CABLE	22AWG*5C, JACKET: PUR, COLOR: BLACK, OD= 5.4mm	NA
ITEM	PART NAME	DESCRIPTION	QY'T

				QUALITY SYMBOLS	Tolerance		NAME: M12 A CODING 5P MALE-FEMALE CABLE				PART NO.	A27-00533XXX-01		
				□: ☒:	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2022/04/19	Huangmei	Jack Chen		A27-001
				▽: ▽:	2001~5000	±100	东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
				ZERO DEFECT S.P.C	5001~	±150								
SIDE	DATE	DESCRIPTION	APPROVER											
8	2022/04/19	FIRST ISSUE	Jack Chen											
8														