


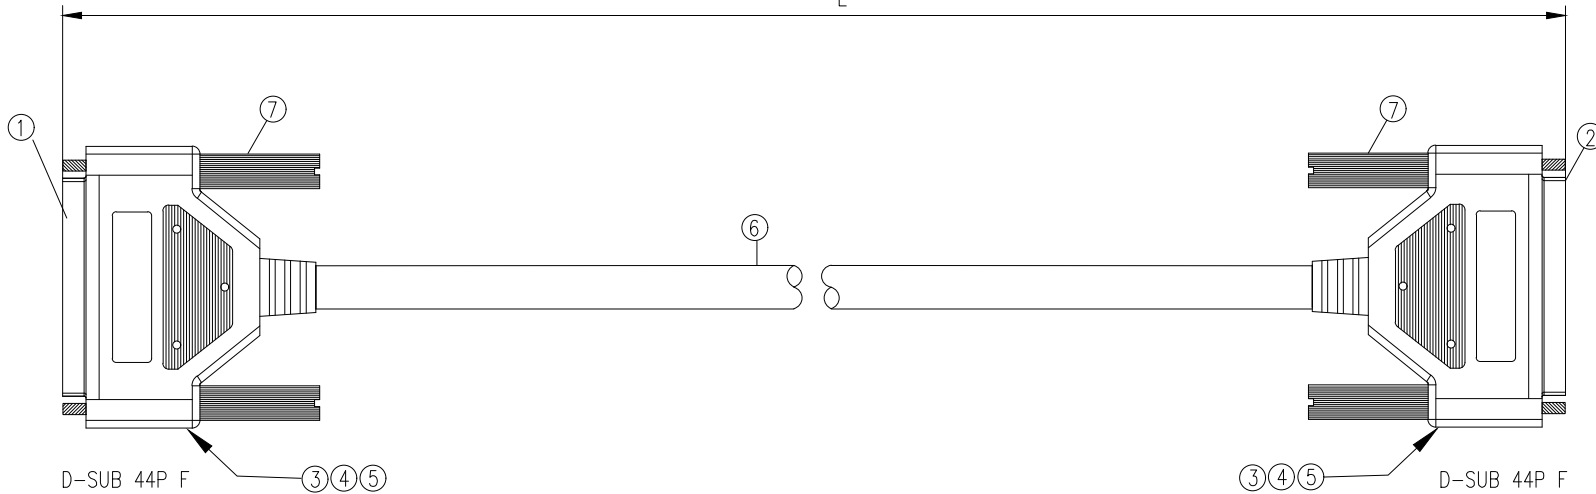


RoHS



PIN ASSIGNMENT

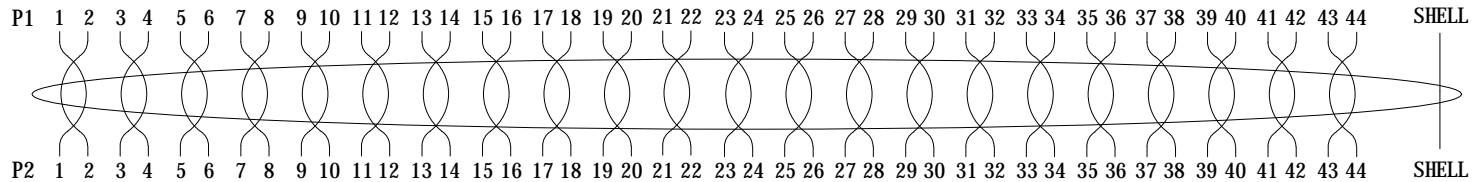

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# Ni(大 E33 BLACK)	4PCS
6	CABLE	UL20276 28AWG*25P+AEB PVC JACKET COLOR:BLACK OD=8.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	HD-SUB 44Pin Female Solder BLACK TYPE	1PCS
1	CONNECTOR	HD-SUB 44Pin Female Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

A	△				QUALITY SYMBOLS	Tolerance		NAME:	HD.D-SUB 44P Female To 44P Female Cable (客户用图)			PART NO.	A04-04421XXX-01		
	△				□:    ☒:	尺寸(CM)	公差(CM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2017/05/04	新版发行	Jack Chen	CRITICAL MAJOR	30~200	±10	SCALE:	NONE	DATE:	2017/05/04	Jack Chen	HP Guan		A04-008
	△				▽:    ▽:	201~500	±20	东莞市林诚塑胶电子有限公司 <a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	501~	±30									