


RoHS

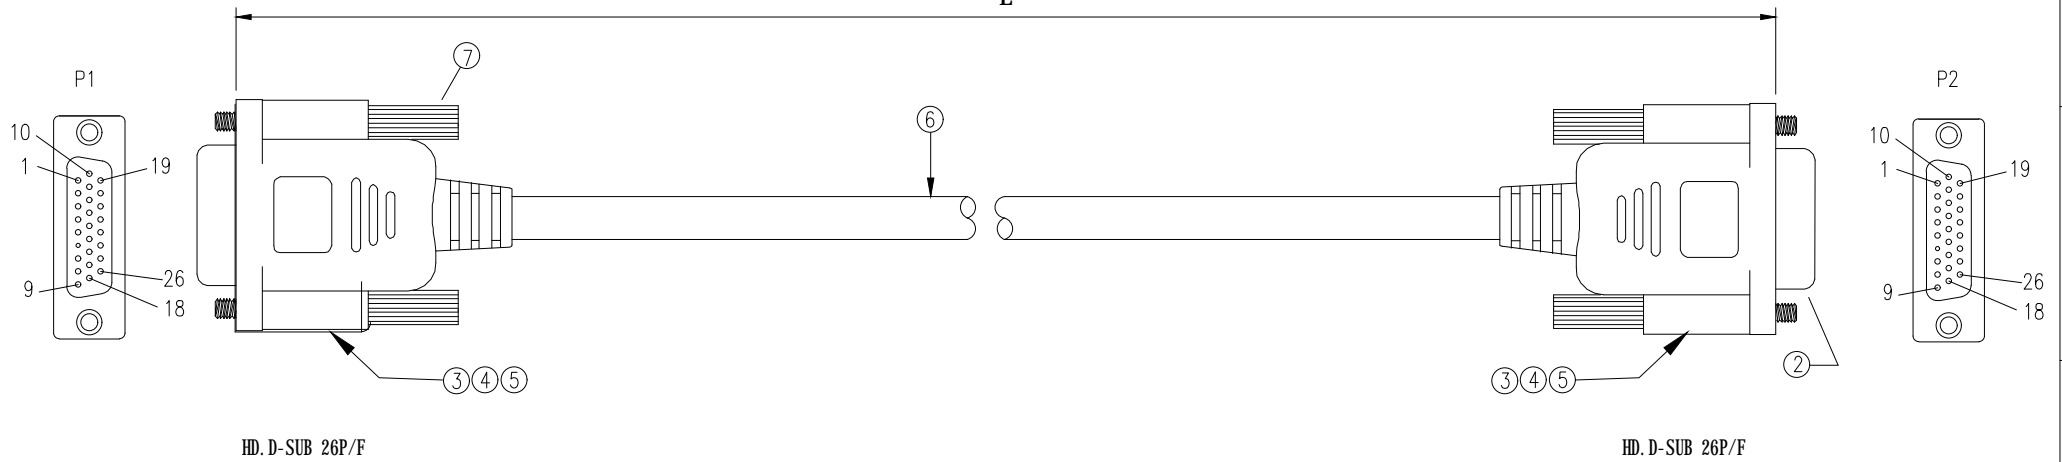

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

P1	SIGNAL	P2	ITEM	PART NAME	DESCRIPTION	QY'T
1		1	7	SCREW	SCREW 4-40# Ni	4PCS
2		2	6	CABLE	UL2919 28AWG*13P+28AWG*1C+AED PVC JACKET COLOR:BLACK OD=7.5mm	1PCS
3		3	5	COPPER FOIL	COPPER FOIL W=25MM	NA
4~23		4~23	4	OVERMOLD	45P PVC COLOR: BLACK	NA
24		24	3	MOLD	PE	NA
25		25	2	CONNECTOR	HD.D-SUB 26Pin Female Solder BLACK TYPE	1PCS
26		26	1	CONNECTOR	HD.D-SUB 26Pin Female Solder BLACK TYPE	1PCS
Shell		Shell				

A	△			QUALITY SYMBOLS	Tolerance		NAME:	HD.D-SUB 26P Female To 26P Female Cable (客户用图)		PART NO.	A04-02621XXX-01			
	△			□:    ☒:	尺寸(CM)	公差(CM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2018/05/24	新版发行	CRITICAL    MAJOR	30~200	±10	SCALE:	NONE	DATE:	2018/05/24	JACK CHEN	KING ZHOU		A04-005
	△			▽:    ▽:	201~500	±20	<a href="http://www.lineconn.com">http://www.lineconn.com</a> lineconn 东莞市林诚塑胶电子有限公司 TEL:0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT    S.P.C	501~	±30								