



RoHS

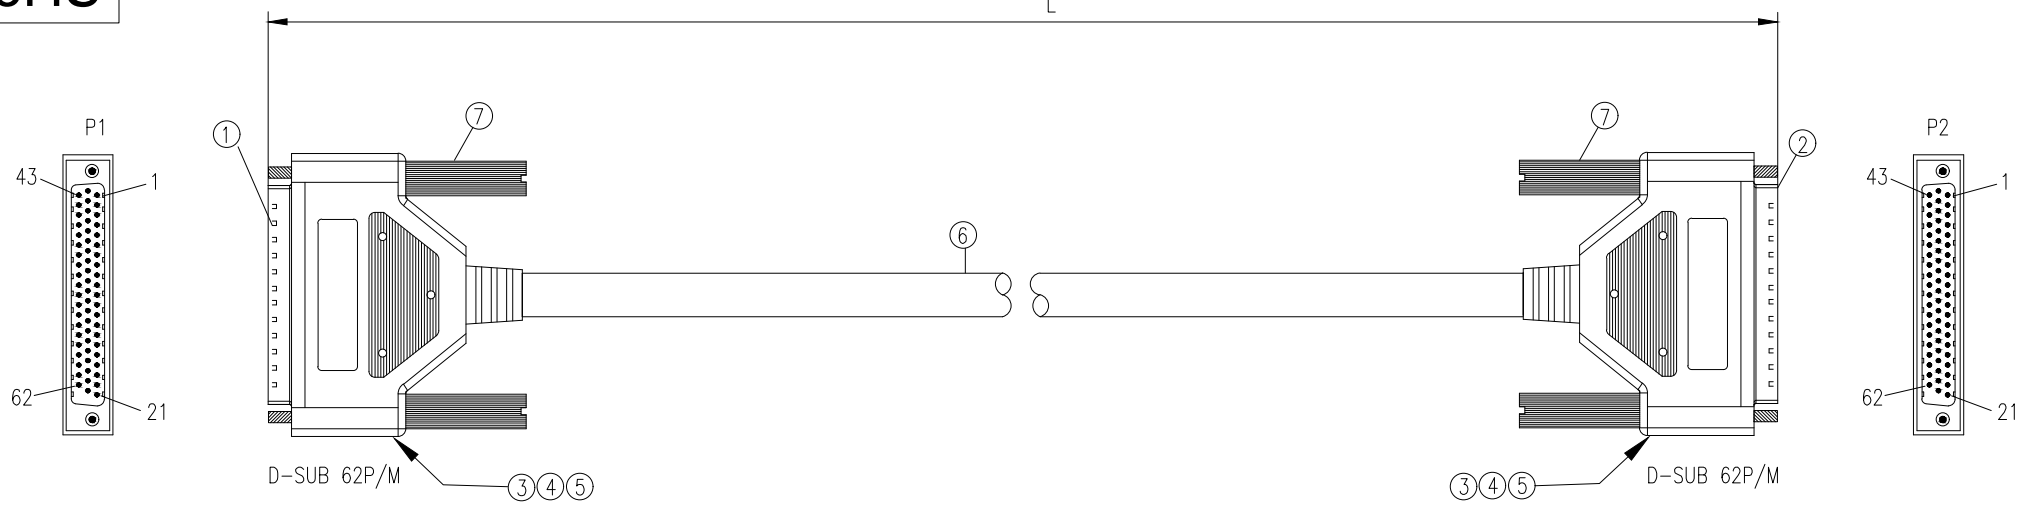

PIN ASSIGNMENT

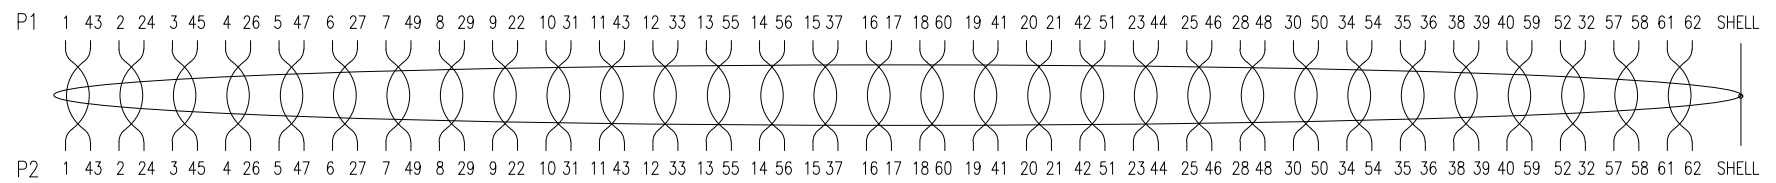

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# Ni(大 E33 BLACK)	4PCS
6	CABLE	UL20276 28AWG*31P+AEB PVC JACKET COLOR:BLACK OD=10.0mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	HD-SUB 62Pin Male Solder BLACK TYPE	1PCS
1	CONNECTOR	HD-SUB 62Pin Male Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

A	△			QUALITY SYMBOLS	Tolerance		NAME: HD-D-SUB 62P Male To 62P Male Cable (客户用图)			PART NO. A04-06211XXX-01	
	△			□: ☒:	尺寸(MM)	公差(MM)	REV: A	UNIT: mm	DRW BY	CHK BY	DRAWING NO.
	△	2015/09/02	新版发行	CRITICAL MAJOR	300~2000	±100	SCALE: NONE	DATE: 2015/09/02	Jack Chen	HP Guan	A04-010
	△			▽: ▽:	2001~5000	±200	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770				
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	5001~					