


RoHS

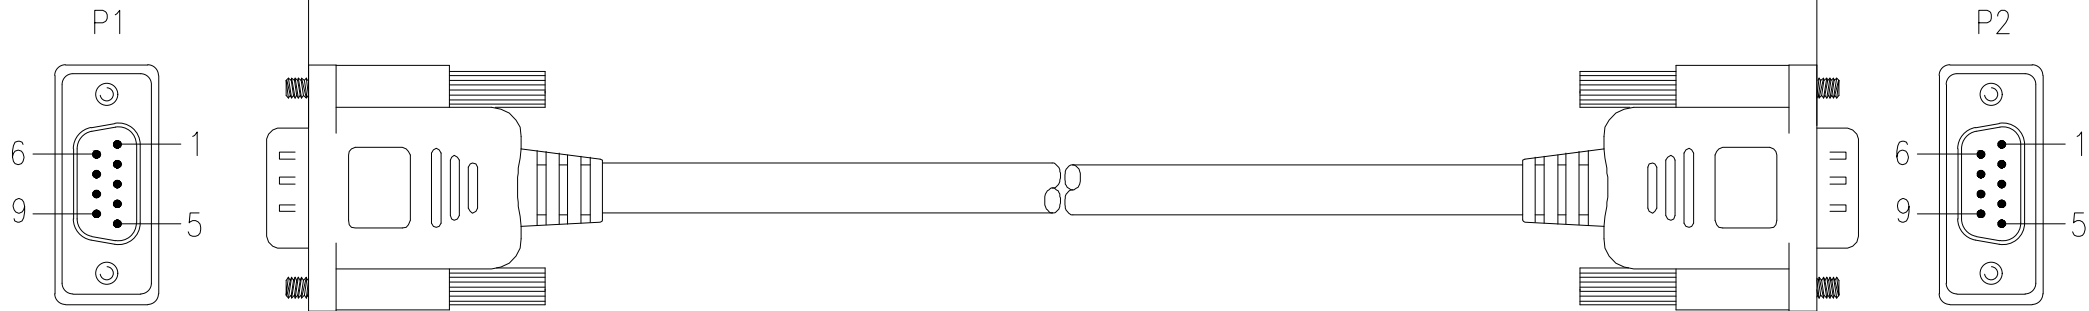

DB 9P 公

DB 9P 公

PIN ASSIGNMENT

P1	PIN ASSIGNMENT	P2	
1	—————	1	黑
2	—————	2	棕
3	—————	3	红
4	—————	4	绿
5	—————	5	黄
6	—————	6	橙
7	—————	7	蓝
8	—————	8	灰
9	—————	9	紫
SHELL	—————	SHELL	
	DRAIN		

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

ITEM	PART NAME	DESCRIPTION	QY'T
6	CABLE	UL2464 28AWG*9C+AD PVC JACKET COLOR:GRAY OD=5.0mm	1PCS
5	SCREW	SCREW 4-40# GRAY	4PCS
4	OVERMOLD	45P PVC COLOR: GRAY	1PCS
3	MOLD	PE	NA
2	CONNECTOR	D-SUB 9Pin Male Solder TYPE Black	1PCS
1	CONNECTOR	D-SUB 9Pin Male Solder TYPE Black	1PCS

A	△			QUALITY SYMBOLS	Tolerance		NAME:	D-SUB 9P Male To 9P Male Cable (客户用图)			PART NO.	A05-00912XXX-01		
	△			□ :	尺寸(CM)	公差(CM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2017/04/21	新版发行	CRITICAL MAJOR	30~200	±10	SCALE:	NONE	DATE:	2017/04/21	JACK ZHENG	KING ZHOU		A05-003
	△			▽ :	201~500	±20								
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C			东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770		