




RoHS



DB 9P 母

PIN ASSIGNMENT

P1	P2	
1	1	黑
2	2	棕
3	3	红
4	4	绿
5	5	黄
6	6	橙
7	7	蓝
8	8	灰
9	9	紫
SHELL	SHELL	
	DRAIN	

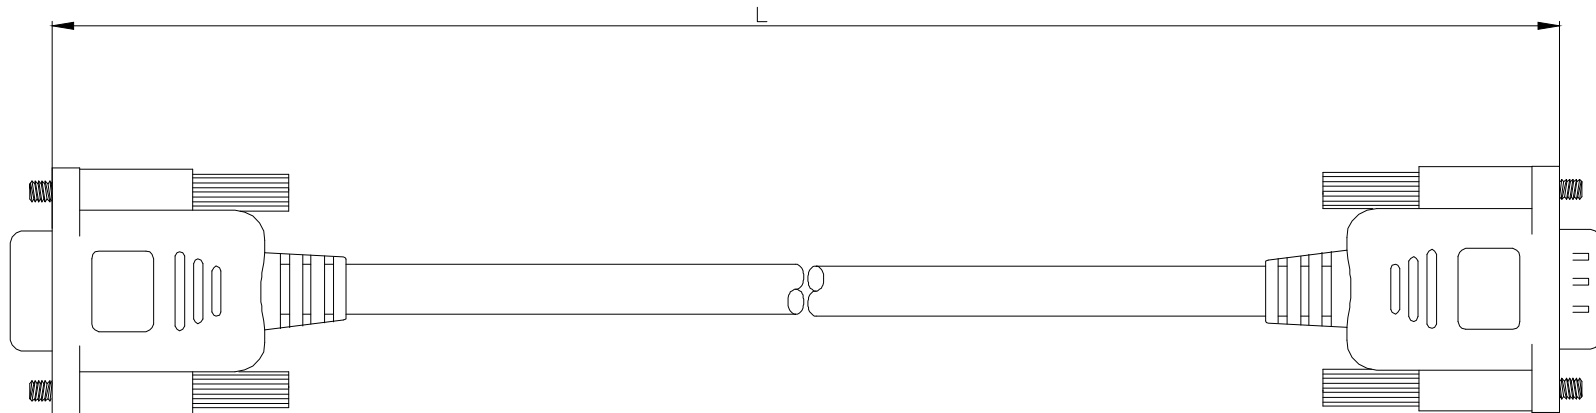

DB 9P 公

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

ITEM	PART NAME	DESCRIPTION	QY'T
6	CABLE	UL2464 28AWG*9C+AD PVC JACKET COLOR:GRAY OD=5.0mm	1PCS
5	SCREW	SCREW 4-40# GRAY	4PCS
4	OVERMOLD	45P PVC COLOR: GRAY	1PCS
3	MOLD	PE	NA
2	CONNECTOR	D-SUB 9Pin Male Solder TYPE Black	1PCS
1	CONNECTOR	D-SUB 9Pin Female Solder TYPE Black	1PCS

△				QUALITY SYMBOLS
△	2017/06/07	按客户要求变更尺寸标注	JANE ZHEN	□: □: <input type="checkbox"/>
△	2017/04/21	新版发行	JANE ZHEN	CRITICAL MAJOR <input type="checkbox"/>
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C <input type="checkbox"/>

Tolerance		NAME:	D-SUB 9P Male To 9P Female Cable (客户用图)			PART NO.	A05-00932XXX-01		
尺寸(CM)	公差(CM)	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
30~200	±10	SCALE:	NONE	DATE:	2017/04/21	JACK ZHENG	KING ZHOU		A05-001
201~500	±20	东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
501~	±30	TEL:0769-85181660 85181770							