


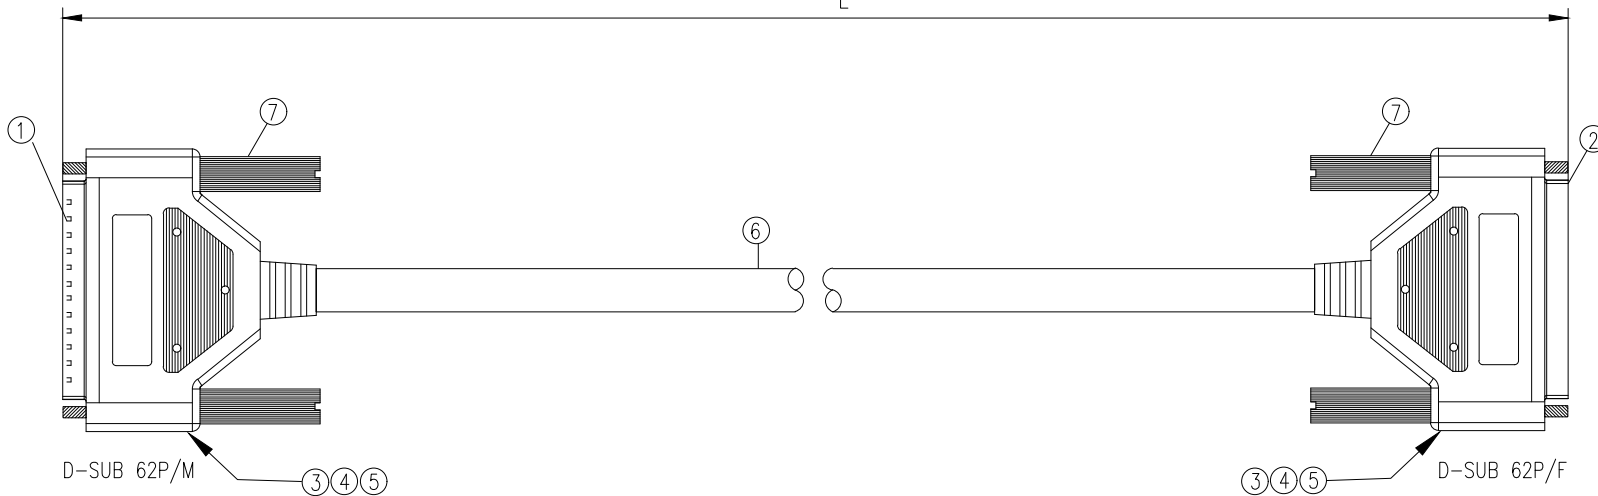


RoHS



PIN ASSIGNMENT

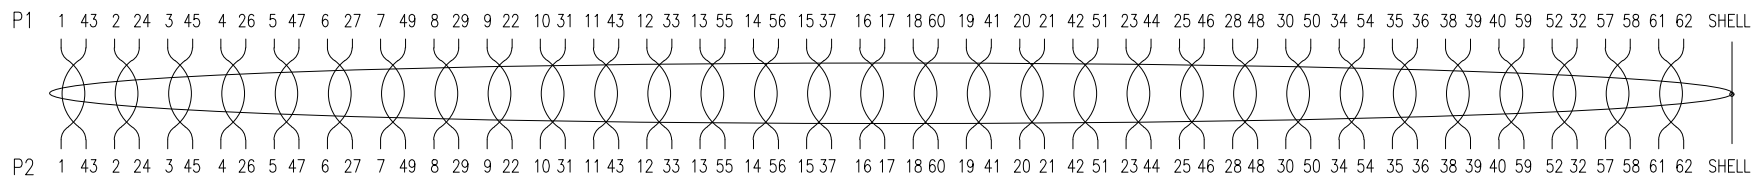

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	SCREW	SCREW 4-40# Ni(大 E33 BLACK)	4PCS
6	CABLE	UL20276 28AWG*31P+AEB PVC JACKET COLOR:BLACK OD=10.0mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	HD-SUB 62Pin Female Solder BLACK TYPE	1PCS
1	CONNECTOR	HD-SUB 62Pin Male Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

A	△			QUALITY SYMBOLS	Tolerance		NAME:	HD-SUB 62P Male To 62P Female Cable (客户用图)			PART NO.	A04-06231XXX-01		
	△			□:      ☒:	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2015/09/02	新版发行	CRITICAL MAJOR	2001~5000	±200	SCALE:	NONE	DATE:	2015/09/02	Jack Chen	HP Guan		A04-012
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	5001~	±300	东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770			
8	7	6	5	4	3	2	1							