




RoHS

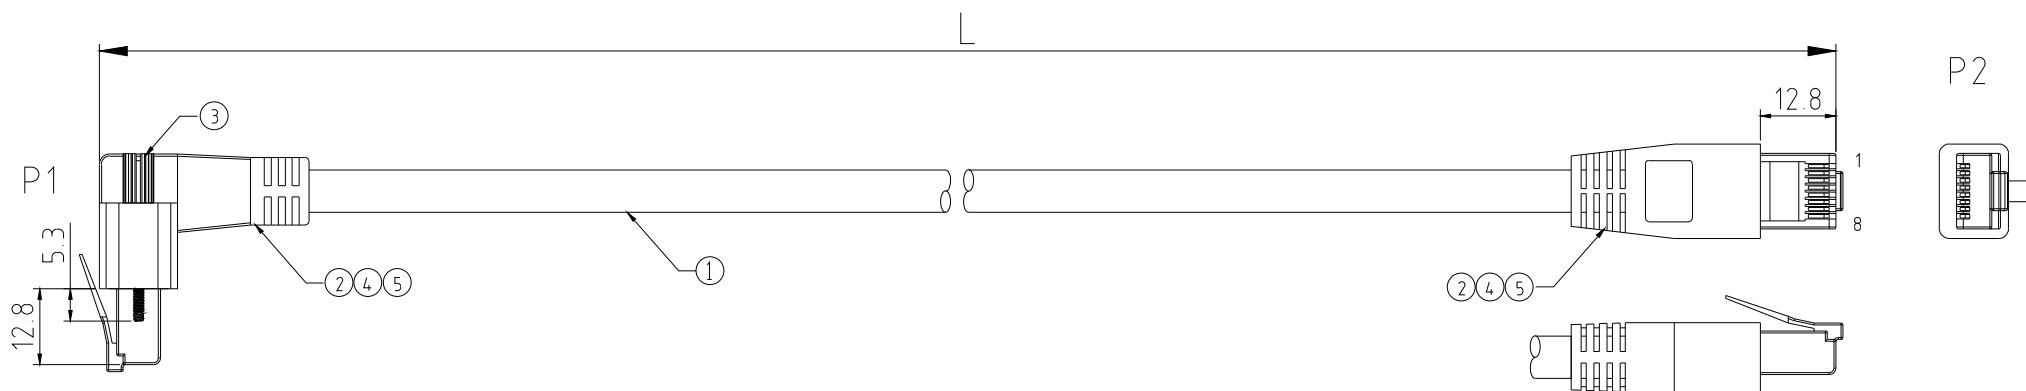

CONNECTION

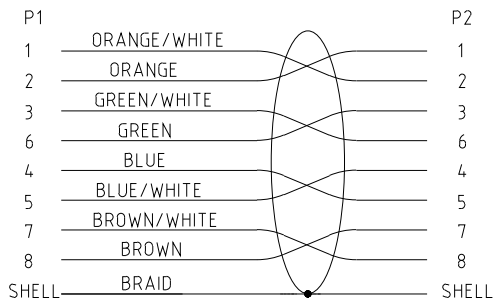

型号	线材规格	长度(dm)
A10-00811XXX-06	黑色普通线4P*24AWG OD 6.0mm	XXX: 001=1dm
A10-00811XXX-A6	黑色拖链线4P*24AWG OD 6.0mm	
A10-00813XXX-06	绿色普通线4P*24AWG OD 6.0mm	XXX: 010=10dm
A10-00813XXX-A6	绿色拖链线4P*24AWG OD 6.0mm	
A10-00811XXX-A7	黑色拖链线4P*26AWG OD 6.0mm	
A10-00818XXX-07	黄色普通线4P*26AWG OD 6.5mm	

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

5	OVERMOLD	PVC 45P COLOR: BLACK	NA
4	MLD	LDPE, Transparent	NA
3	SCREW	5*24直花一字档牙螺丝M2.0	2PCS
2	CONN	RJ45 CONNECTOR, 8P8C. WITH SHEEL	2PCS
1	CABLE	千兆工业网线4P, 双屏蔽, 千万次拖链(其他参数见料号规格说明)	NA
ITEM	PART NAME	DESCRIPTION	QY' T

A	△				QUALITY SYMBOLS	Tolerance		NAME:	千兆工业网线8P8C直头-弯头(外弹)			PART NO.	A10-0081X XXX-XX		
	△				□: ☒:	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2018/09/11	新版发行	Jing Li	CRITICAL MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2018/09/11	Jing Li	Jack Chen		A10-013
	△				▽: ▽:	2001~5000	±100								
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	5001~	±150	东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770				