



RoHS

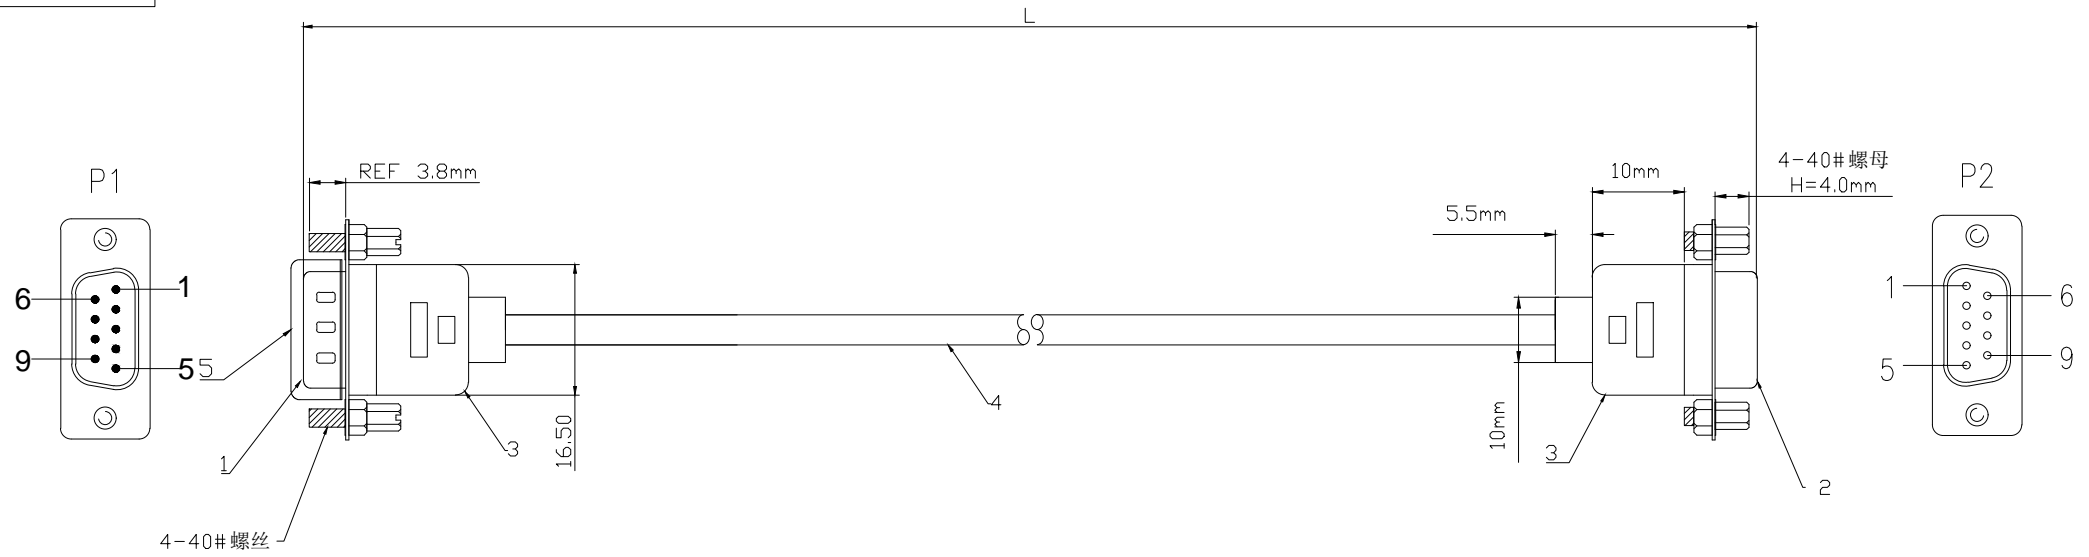

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

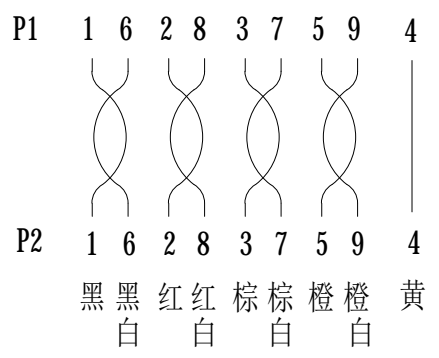

5	防尘盖	PE-防尘盖	1PCS
4	CABLE	UL2464 24AWG*4P+24AWG*1C+ PVC JACKET COLOR:BLACK OD=6.0mm	1PCS
3	OVERMOLD	50P PVC COLOR: GRAY	NA
2	CONNECTOR	D-SUB 9Pin Male Solder TYPE Black	1PCS
1	CONNECTOR	D-SUB 9Pin Female Solder TYPE Black	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

A	△				QUALITY SYMBOLS	Tolerance		NAME:	D-SUB 9P Male To 9P Female Cable (客户用图) 超短		PART NO.	A05-00931XXX-02			
	△				□: ☒:	尺寸(CM)	公差(CM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2017/04/21	新版发行	JANE ZHEN	CRITICAL MAJOR	30~200	±10	SCALE:	NONE	DATE:	2017/04/21	JACK ZHENG	KING ZHOU		A05-004
	△				▽: ▽:	201~500	±20	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	501~	±30								
	8	7	6	5	4	3	2	1							