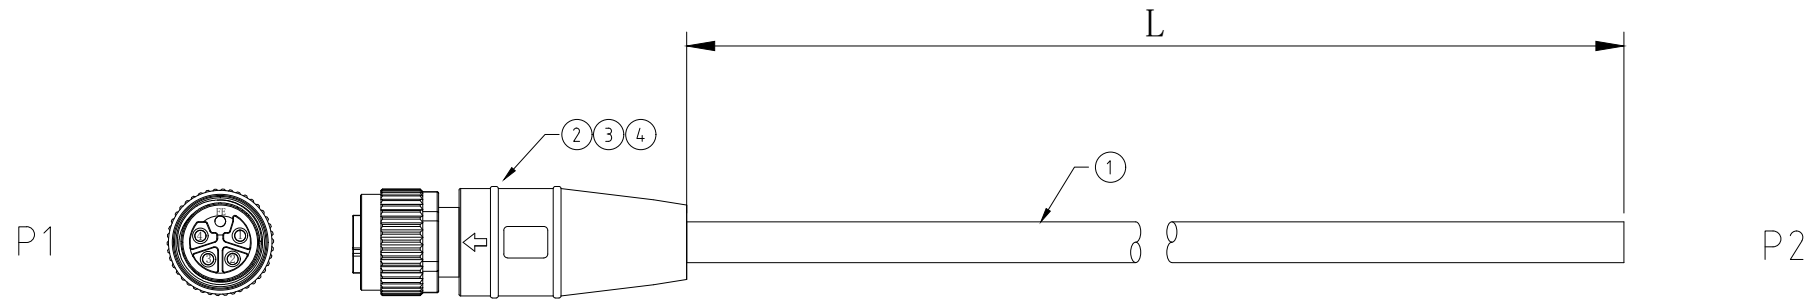


RoHS





PIN ASSIGNMENT

P1	WIRE COLOR	P2
1	_____	
2	_____	
3	_____	
4	_____	
5	_____	

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

4	PE	PE	NA
3	OVERMOLD	BLACK PVC 45P	NA
2	CONN	M12 5P FEMALE L CODE SOLER MOLDED TYPE (B10-M12LT05L-02)	1PCS
1	CABLE	5C*0.2+ADB ,JACKET:PVC,COLOR:BLACK, OD= 5.5mm	NA
ITEM	PART NAME	DESCRIPTION	QY'T

				QUALITY SYMBOLS		Tolerance		NAME: M12 5P female L code to open		PART NO. A27-00551XXX-L0						
A	△	2023/09/10	First issue	Jack Chen	□ :	⊗ :	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
					CRITICAL	MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2023/09/10	Lei Fan	Jack Chen	A27-003	
					▽ :	▽ :	2001~5000	±100	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	5001~	±150			TEL:0769-85181660 85181770						
8	7	6	5	4	3	2	1									