


额定电流: 1A
 额定电压: 100VAC rms
 绝缘耐电压: 500VAC(r.m.s.)/ 1minute
 绝缘抗阻: 500M Ω Min. at 500VDC
 工作温度: -20°C to 105°C
 防护等级: IP67

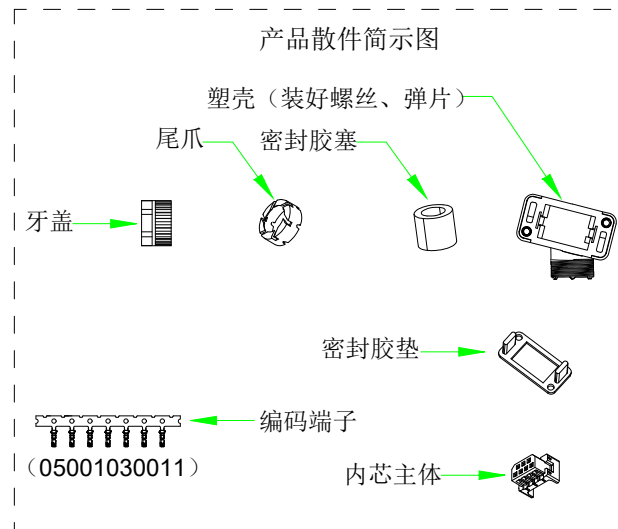

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
9	螺丝	SPCC	COLOR:BLACK	2PCS
8	弹片	不锈钢SUS		2PCS
7	编码端子	磷青铜C519-H	PLATING: Au	7PCS
6	尾爪	PA66+30%GF UL94V-0	COLOR:BLACK	1PCS
5	密封胶垫	橡胶 TPPA	COLOR:BLACK	1PCS
4	密封胶垫	橡胶 TPPA	COLOR:BLACK	1PCS
3	内芯主体	PA66+30%GF UL94V-0	COLOR:BLACK	1PCS
2	牙盖	PA66+30%GF UL94V-0	COLOR:BLACK	1PCS
1	塑壳	PA66+30%GF UL94V-0	COLOR:BLACK	1PCS

(05001030011)

△				QUALITY SYMBOLS	Tolerance	NAME:	JN01-07P伺服编码器线端插头				PART NO.	B01-JN01007P-01	
△				□: ☒:	x. ±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2022/03/07	新版发行	Jack Chen	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2022/03/07	Huangmei	Jack Chen		B01-060
SIDE	DATE	DESCRIPTION	APPROVER	▽: ▽:	.xx ±0.25	东莞市林诚塑胶电子有限公司 http://www.lineconn.com							TEL:0769-85181660 85181770

				ZERO DEFECT S.P.C		东莞市林诚塑胶电子有限公司 http://www.lineconn.com							TEL:0769-85181660 85181770
--	--	--	--	-------------------	--	---	--	--	--	--	--	--	----------------------------