



Voltage Current Rating: 5 AMP.
 Dielectric Withstanding Voltage: 1000V AC
 Insulation Resistance: 1000M Ω Min.
 Temperature Range: -25°C to +85°C

PART NO: B05-0503X14N-02

HOUSING COLOR:

- 1 = BLACK
- 5 = WHITE
- 6 = BLUE

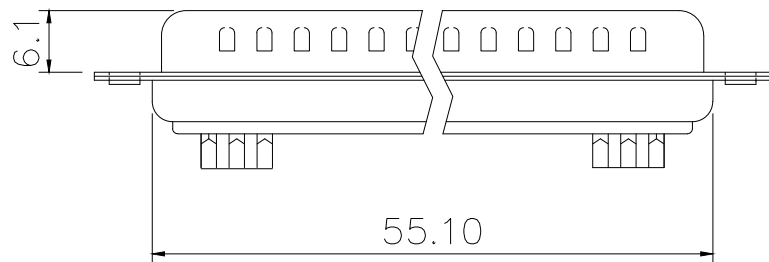

4	REAR SHELL	SPCC	PALTING: Sn	
3	FRONT SHELL	SPCC	PALTING: Ni	
2	HOUSING	PBT+30%GF	COLOR: SEE PART NO.	
1	TERMINAL	COPPER ALLOY	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS


QUALITY SYMBOLS

- \square : CRITICAL
- \boxtimes : MAJOR
- ∇ : ZERO DEFECT
- ∇ : S.P.C

Tolerance

- x: ± 0.50
- .x: ± 0.30
- .xx: ± 0.25

NAME:		D-SUB 50P公头车针焊线式 (客户用图)			PART NO.		B05-0503X14N-02				
REV:	A	UNIT:	mm	DRW BY:	JINGLI	CHK BY:	KING ZHOU	APP BY:		DRAWING NO.	B05-021
SCALE:	N:1	DATE:	2010/06/03								



lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL: 0769-85181660 85181770

\triangle	2010/06/03	NEW ISSUE	JINGLI						
SIDE	DATE	DESCRIPTION	APPROVER						
8	7	6	5	4	3	2	1		