



Voltage Current Rating:5 AMP.
 Dielectric Withstanding Voltage:1000V AC
 Insulation Resistance:1000MΩ Min.
 Temperature Range:-25℃ to +85℃

PART NO: B04-0783X14N-02

HOUSING COLOR:

- 1 = BLACK
- 5 = WHITE
- 6 = BLUE

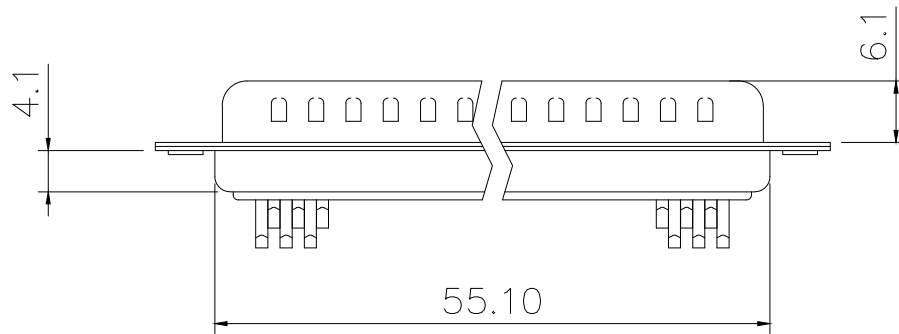

4	REAR SHELL	SPCC	PALTING: Sn	
3	FRONT SHELL	SPCC	PALTING: Ni	
2	HOUSING	PBT+30%GF	COLOR: SEE PART NO.	
1	TERMINAL	COPPER ALLOY	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

				QUALITY SYMBOLS		Tolerance		NAME: HD.D-SUB 78P公头车针焊线式 (客户用图)			PART NO. B04-0783X14N-02		
				□ :	☒ :	x:	±0.50	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL	MAJOR	.x	±0.30	SCALE: N:1	DATE: 2010/06/03	JINGLI	KING ZHOU		B04-006
				▽ :	▽ :	.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com
SIDE		DATE		DESCRIPTION		APPROVER		TEL:0769-85181660 85181770					

A

A