


High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25°C to +85°C

PART NO:

B09-3V341140-X1

Current Rating:

- A = 10 AMPS Dim.A Ø1.7
- B = 20 AMPS Dim.A Ø2.8
- C = 30 AMPS Dim.A Ø3.2
- D = 40 AMPS Dim.A Ø4.6

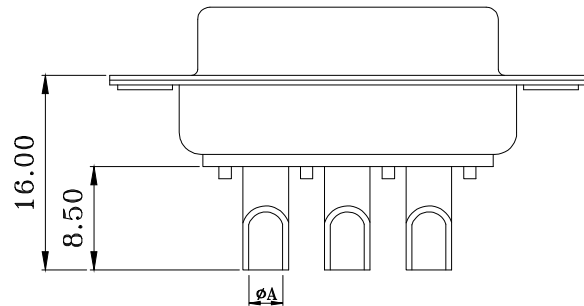

4	HOUSING	PBT+30%GF	COLOR: BLACK	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS


QUALITY SYMBOLS

- : CRITICAL
- ☒: MAJOR
- ▽: ZERO DEFECT
- ▽: S.P.C

Tolerance

- x. ±0.50
- .x ±0.30
- .xx ±0.25

NAME:		3V3母头焊线式光孔 POWER D-SUB (客户用图)			PART NO.	B09-3V341140-X1	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2012/09/26	JINGLI	KING ZHOU		B09-004



Lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770

△	2012/09/26	NEW ISSUE	JINGLI	
SIDE	DATE	DESCRIPTION	APPROVER	