


RoHS COMPLIANT

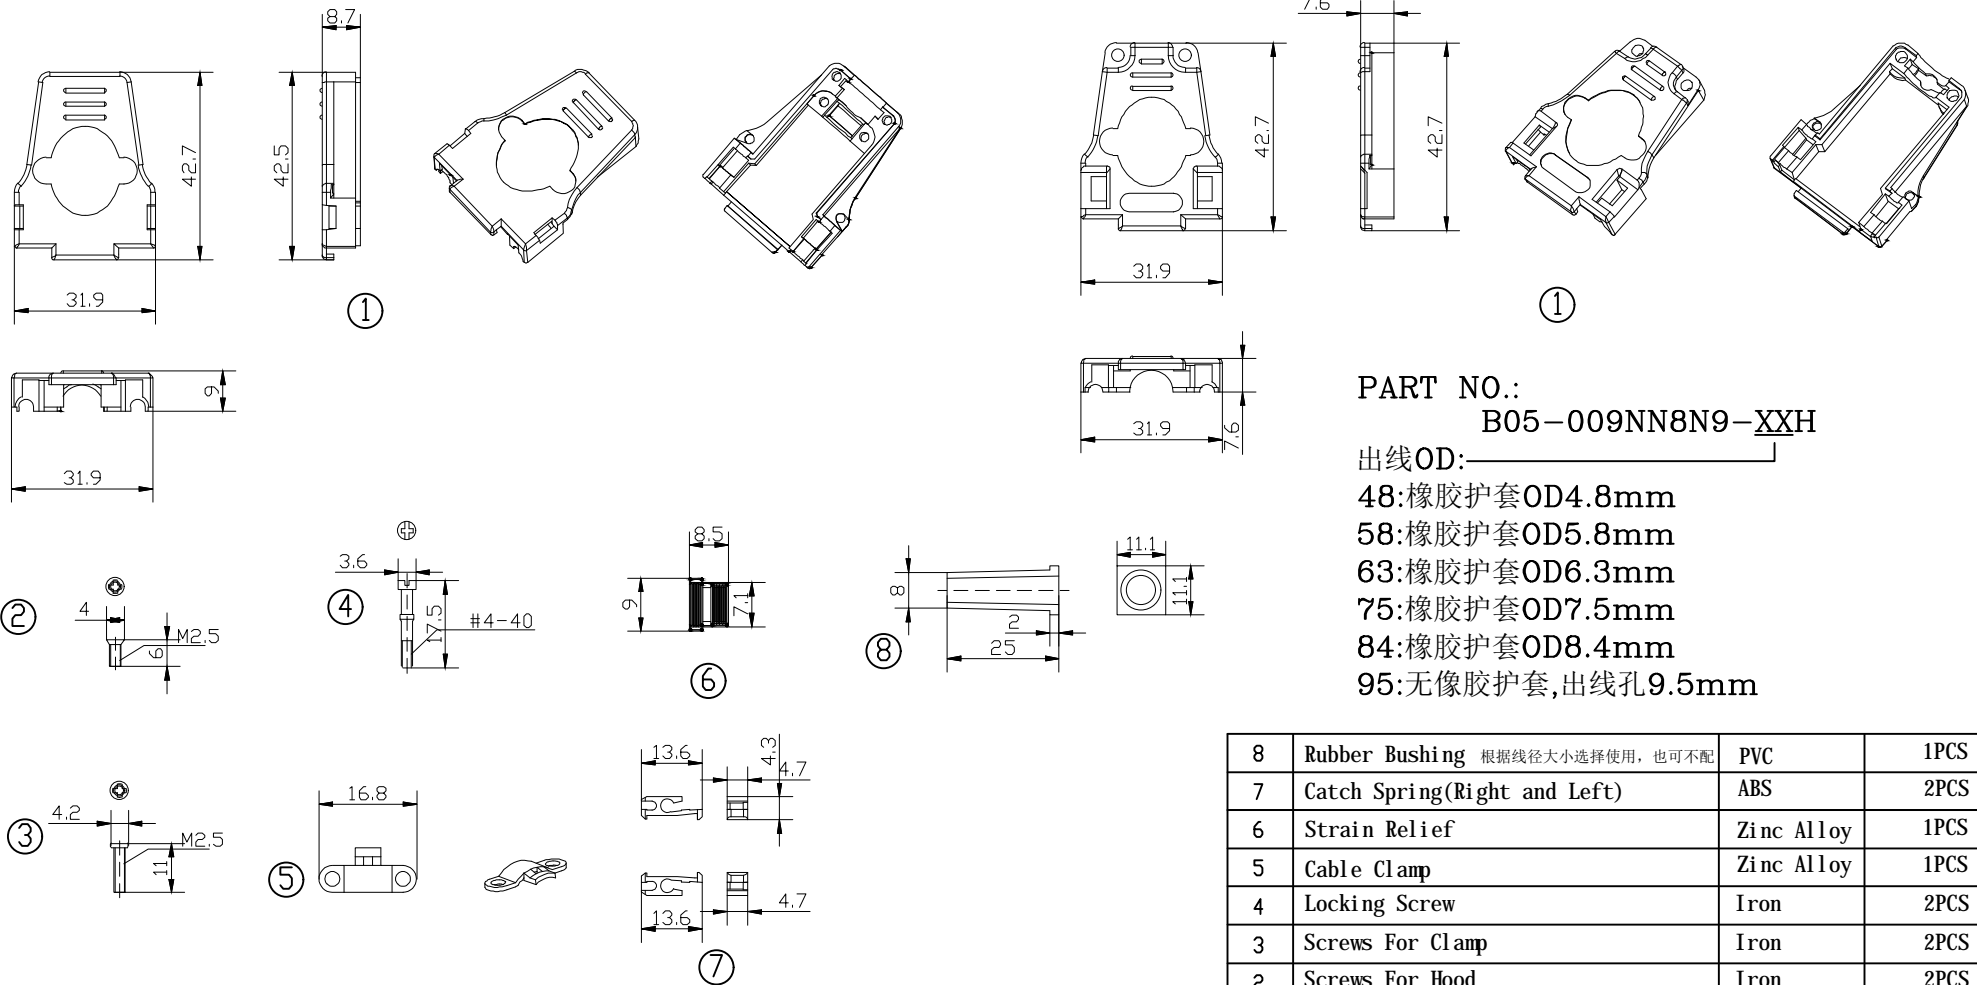

PART NO.:
B05-009NN8N9-XXH

出线OD: _____
 48:橡胶护套OD4.8mm
 58:橡胶护套OD5.8mm
 63:橡胶护套OD6.3mm
 75:橡胶护套OD7.5mm
 84:橡胶护套OD8.4mm
 95:无橡胶护套,出线孔9.5mm

ITEM	名称	材质	数量
8	Rubber Bushing 根据线径大小选择使用,也可不配	PVC	1PCS
7	Catch Spring(Right and Left)	ABS	2PCS
6	Strain Relief	Zinc Alloy	1PCS
5	Cable Clamp	Zinc Alloy	1PCS
4	Locking Screw	Iron	2PCS
3	Screws For Clamp	Iron	2PCS
2	Screws For Hood	Iron	2PCS
1	Hoods(Lid and base)	Zinc Alloy	1SET

SIDE	DATE	DESCRIPTION	APPROVER
	2023/03/13	Add the size of the aperture of the rubber bushing	Shuo Cao
	2021/04/21	NEW ISSUE	Shuo Cao

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	x. ±0.80	
CRITICAL	MAJOR	.x ±0.50	
∇ :	∇ :	.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:	D-SUB 9P 锌合金外壳 FMK 型短螺丝 (客户用图)				PART NO.	B05-009NN8N9-XXH		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2021/04/21	Huangmei	Shuo Cao		B05-116	
Lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com				
				TEL:0769-85181660 85181770				

