


RoHS

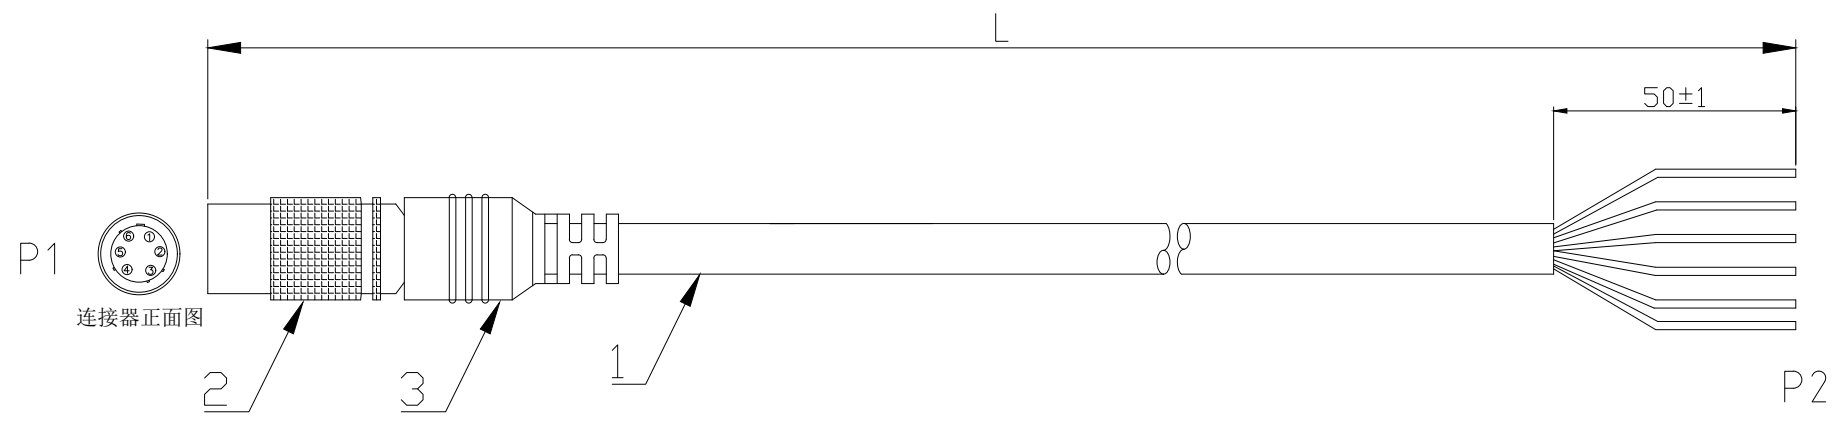

PIN ASSIGNMENT

P1	WIRE COLOR	P2
1	红 "+" 0.2SQ	
2	黄	
3	白	
4	蓝	
5	绿	
6	黑 "-" 0.2SQ	

型号	线材规格	长度(dm)
A10-00641XXX-02	普通线	XXX:001=1dm
A10-00641XXX-A2	拖链线	XXX:010=10dm

- NOTES:
- ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 - CONDUCTOR RESISTANCE: 5 OHMS MAX.
 - INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 - THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

4	TUBE	TUBE BLACK ϕ 6.0*30MM	1PCS	
3	OVERMOLD	PVC 45P BLACK	NA	
2	CONN	HR10A-7P-6S国产品	1SET	
1	CABLE	2*0.2+4*0.15+Filler+AL+B, BLACK, OD=5.5mm	NA	
ITEM	PART NAME		DESCRIPTION	QTY

QUALITY SYMBOLS				Tolerance		NAME: 工业相机电源线 HR10A 6芯成型式-OPEN				PART NO. A10-00641XXX-X2					
△	2023/09/14	Fixed incorrect labeling of wiring diagram	Jack Chen	□:	☒:	尺寸(MM)	公差(MM)	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL	MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2021/11/18	Jing Li	Jack Chen		A10-012
△	2021/11/18	FIRST ISSUE	JING LI	▽:	▽:	2001~5000	±100	http://www.lineconn.com Lineconn 东莞市林诚塑胶电子有限公司 TEL:0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	5001~	±150								