
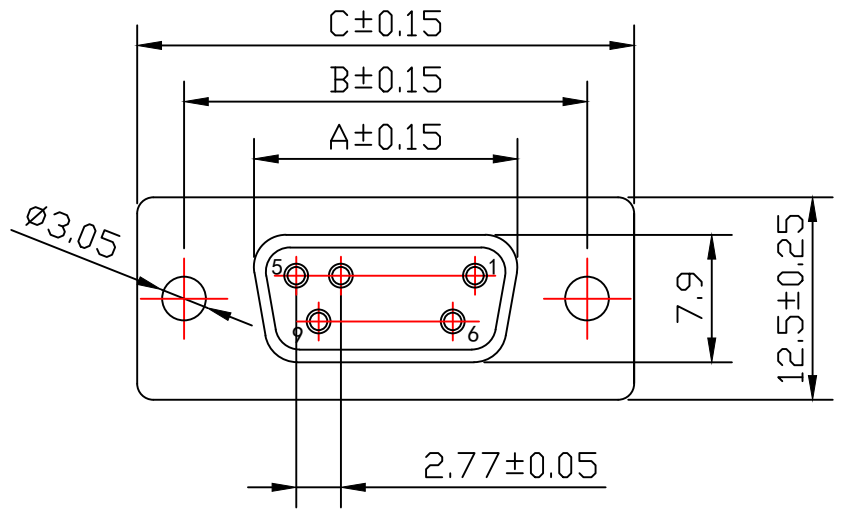
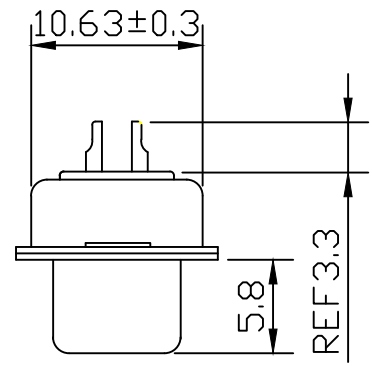


Pin No.	A	B	C±0.38
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

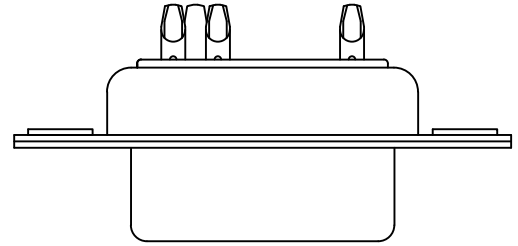

Voltage current rating: 3 AMP.
 Dielectric withstanding voltage: 1000V AC
 Insulation resistance: 1000MΩ min.
 Temperature range: -55℃ to +105℃

Part No.: B05-0XX4X1XN-01
 Pin No.: _____
 09: 9pin
 15: 15pin
 25: 25pin
 37: 37pin
 Housing color: _____
 1: Black
 5: White
 6: Blue
 Terminal plating: _____
 A: G/F
 C: Au 3u"
 K: Au 30u"

4	REAR SHELL	SPCC	PLATING: Sn
3	FRONT SHELL	SPCC	PLATING: Ni
2	HOUSING	PBT+30%GF	COLOR: SEE PART NO.
1	TERMINAL	COPPER ALLOY	CONTACT AREA: SEE P/N SOLDER AREA: Sn
ITEM	DESC.	MATERIAL	REMARKS

△	2021/11/04	修正电气参数	Jack Chen
△	2021/11/01	增加端子电镀规格	Jack Chen
△	2009/04/14	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	

QUALITY SYMBOLS	Tolerance	NAME:	D-SUB 母头焊线式通孔			PART NO.	B05-0XX4X1AN-01		
□: ☒:	.x ±0.60	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2009/04/14	Huangmei	Jack Chen		B05-018
▽: ▽:	.xx ±0.25	lineconn		东莞市林诚塑胶电子有限公司			http://www.lineconn.com		
ZERO DEFECT S.P.C				TEL:0769-85181660 85181770					
		4	3	2	1				

Lineconn logo and company name: 东莞市林诚塑胶电子有限公司
 Website: http://www.lineconn.com
 Phone: TEL:0769-85181660 85181770