
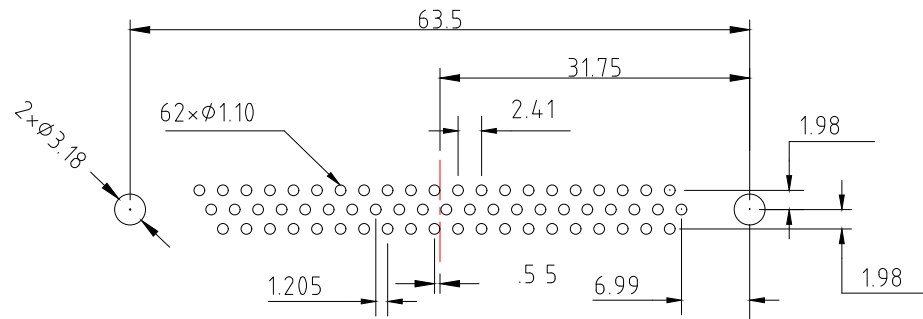


Voltage Current Rating:5 AMP.  
 Dielectric Withstanding Voltage:1000V AC  
 Insulation Resistance:1000MΩ Min.  
 Temperature Range:-55°C to +105°C

PART NO: B04-0628X1XD-02

Housing color:  
 1:Black  
 5:White  
 6:Blue  
 Terminal plating:  
 4:Full gold 2u"  
 5:Full gold 1u"

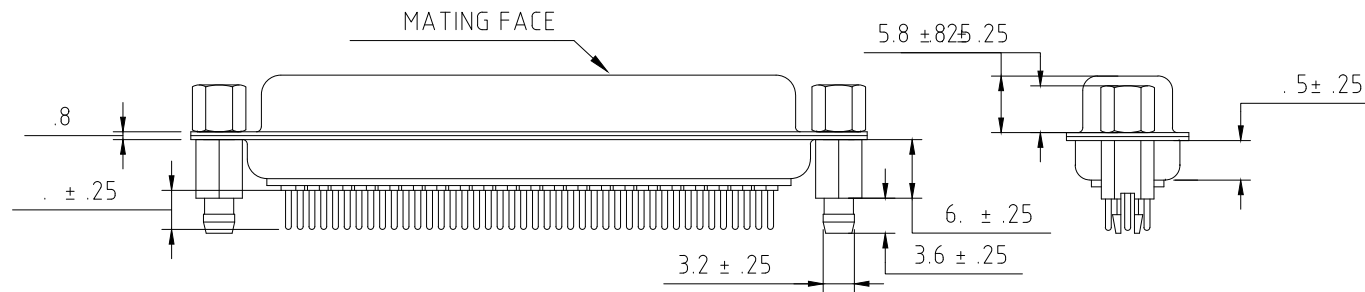

RECOMMENDED P.C.B LAYOUT

6	SCREW	STEEL	PALTING: Ni
5	BOARDLOCK	COPPER ALLOY	PALTING: Ni
4	HOUSING	PBT+30%GF	COLOR: SEE PART NO.
3	REAR SHELL	SPCC	PALTING: Sn
2	FRONT SHELL	SPCC	PALTING: Ni
1	TERMINAL	COPPER ALLOY	PALTING: SEE PART NO.
ITEM	DESC.	MATERIAL	REMARKS

				QUALITY SYMBOLS		Tolerance		NAME: HD. D-SUB 62P车针母头180度直插, 后铆6.0铜柱, 前锁4.8螺母		PART NO. B04-0628X1XD-02					
△				□:	☒:	.x	±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2023/08/23	NEW ISSUE	Jack Chen	CRITICAL	MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2023/08/23	Huangmei	Jack Chen		B04-073
SIDE	DATE	DESCRIPTION	APPROVER	▽:	▽:	.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com			
8	7	6	5	ZERO DEFECT S.P.C				TEL:0769-85181660 85181770							