


SECTION:B-B

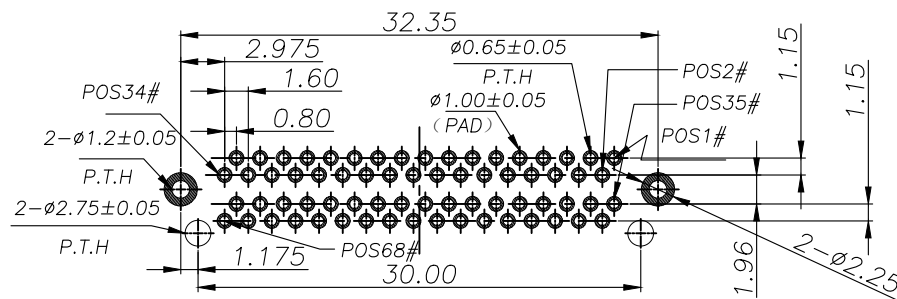

Recommended P.C.B Layout T=1.6MM

RATED CURRENT: 0.30A/CONTACT
 INSULATION RESISTANCE: 500MOHM MIN.
 DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MINUTE.
 OPERATING TEMPERATURE: -55°C TO +105°C

5	BOARD LOCK	COPPER ALLOY	PLATED NI
4	SCREWS	COPPER ALLOY	PLATED NI
3	HOUSING	LCP+30%G.F.	COLOR: BLACK
2	SHELL	SPCC	PLATING: Ni
1	TERMINAL	COPPER ALLOY	CONTACT AREA: PLATED G/F SOLDER AREA: PLATED TIN
ITEM	DESC.	MATERIAL	REMARKS

A	△			QUALITY SYMBOLS	Tolerance x: ±0.60 .x: ±0.40 .xx: ±0.25	NAME: VHDCI 68P母头180度直插				PART NO. B06-068811AA-01		
	△	2024/03/20	增加铁壳卡点	Jack Chen		REV: B	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO. B06-031	
	△	2019/04/23	First edition release	Jack Chen	CRITICAL MAJOR	SCALE: N:1	DATE: 2019/04/23	Huangmei	Jack Chen			
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770						