




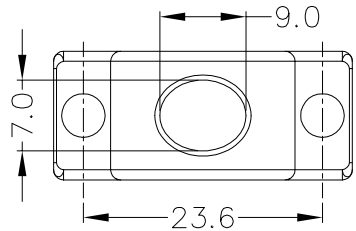
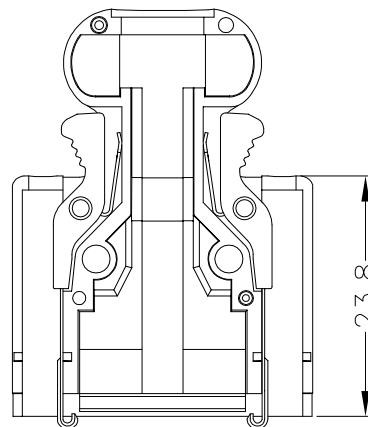
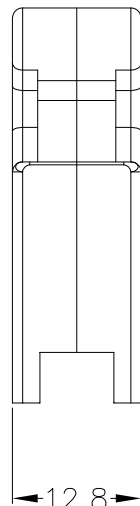


Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +105℃
ROHS compliant
Part No.:

Solder area: B01-014311X2-01
3: G/F
C: Sn

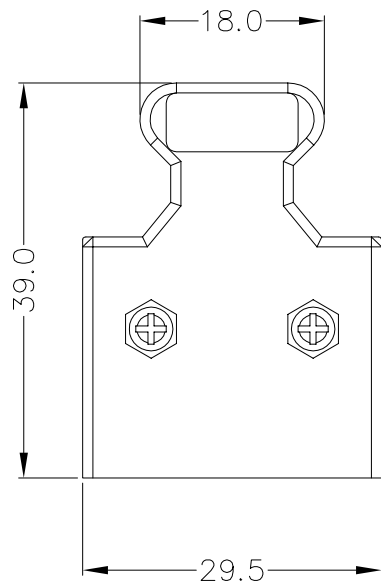

10	Screw	Steel	Plating: Ni, M2.0
9	Screw	Steel	Plating: Ni
8	Nut	Steel	Plating: Ni
7	Hood	PBT	Color: black
6	Latch	ABS, SUS 304	Color: black
5	Clamp	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remarks

△	2022/07/13	Added the size of the cable clamp	Shuo Cao
△	2020/06/28	Open a new mold and adjust the dimensional	Shuo Cao
△	2009/06/04	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: □:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25
⊕ ⊖

NAME:	SM(SCSI) 14pin male solder assembly plastic hood with latch	PART NO.	B01-014311X2-01
REV:	E	UNIT:	mm
SCALE:	N:1	DATE:	2009/06/04
DRW BY	Huangmei	CHK BY	Shuo Cao
APP BY		DRAWING NO.	B01-010
lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com			
TEL:0769-85181660 85181770			