


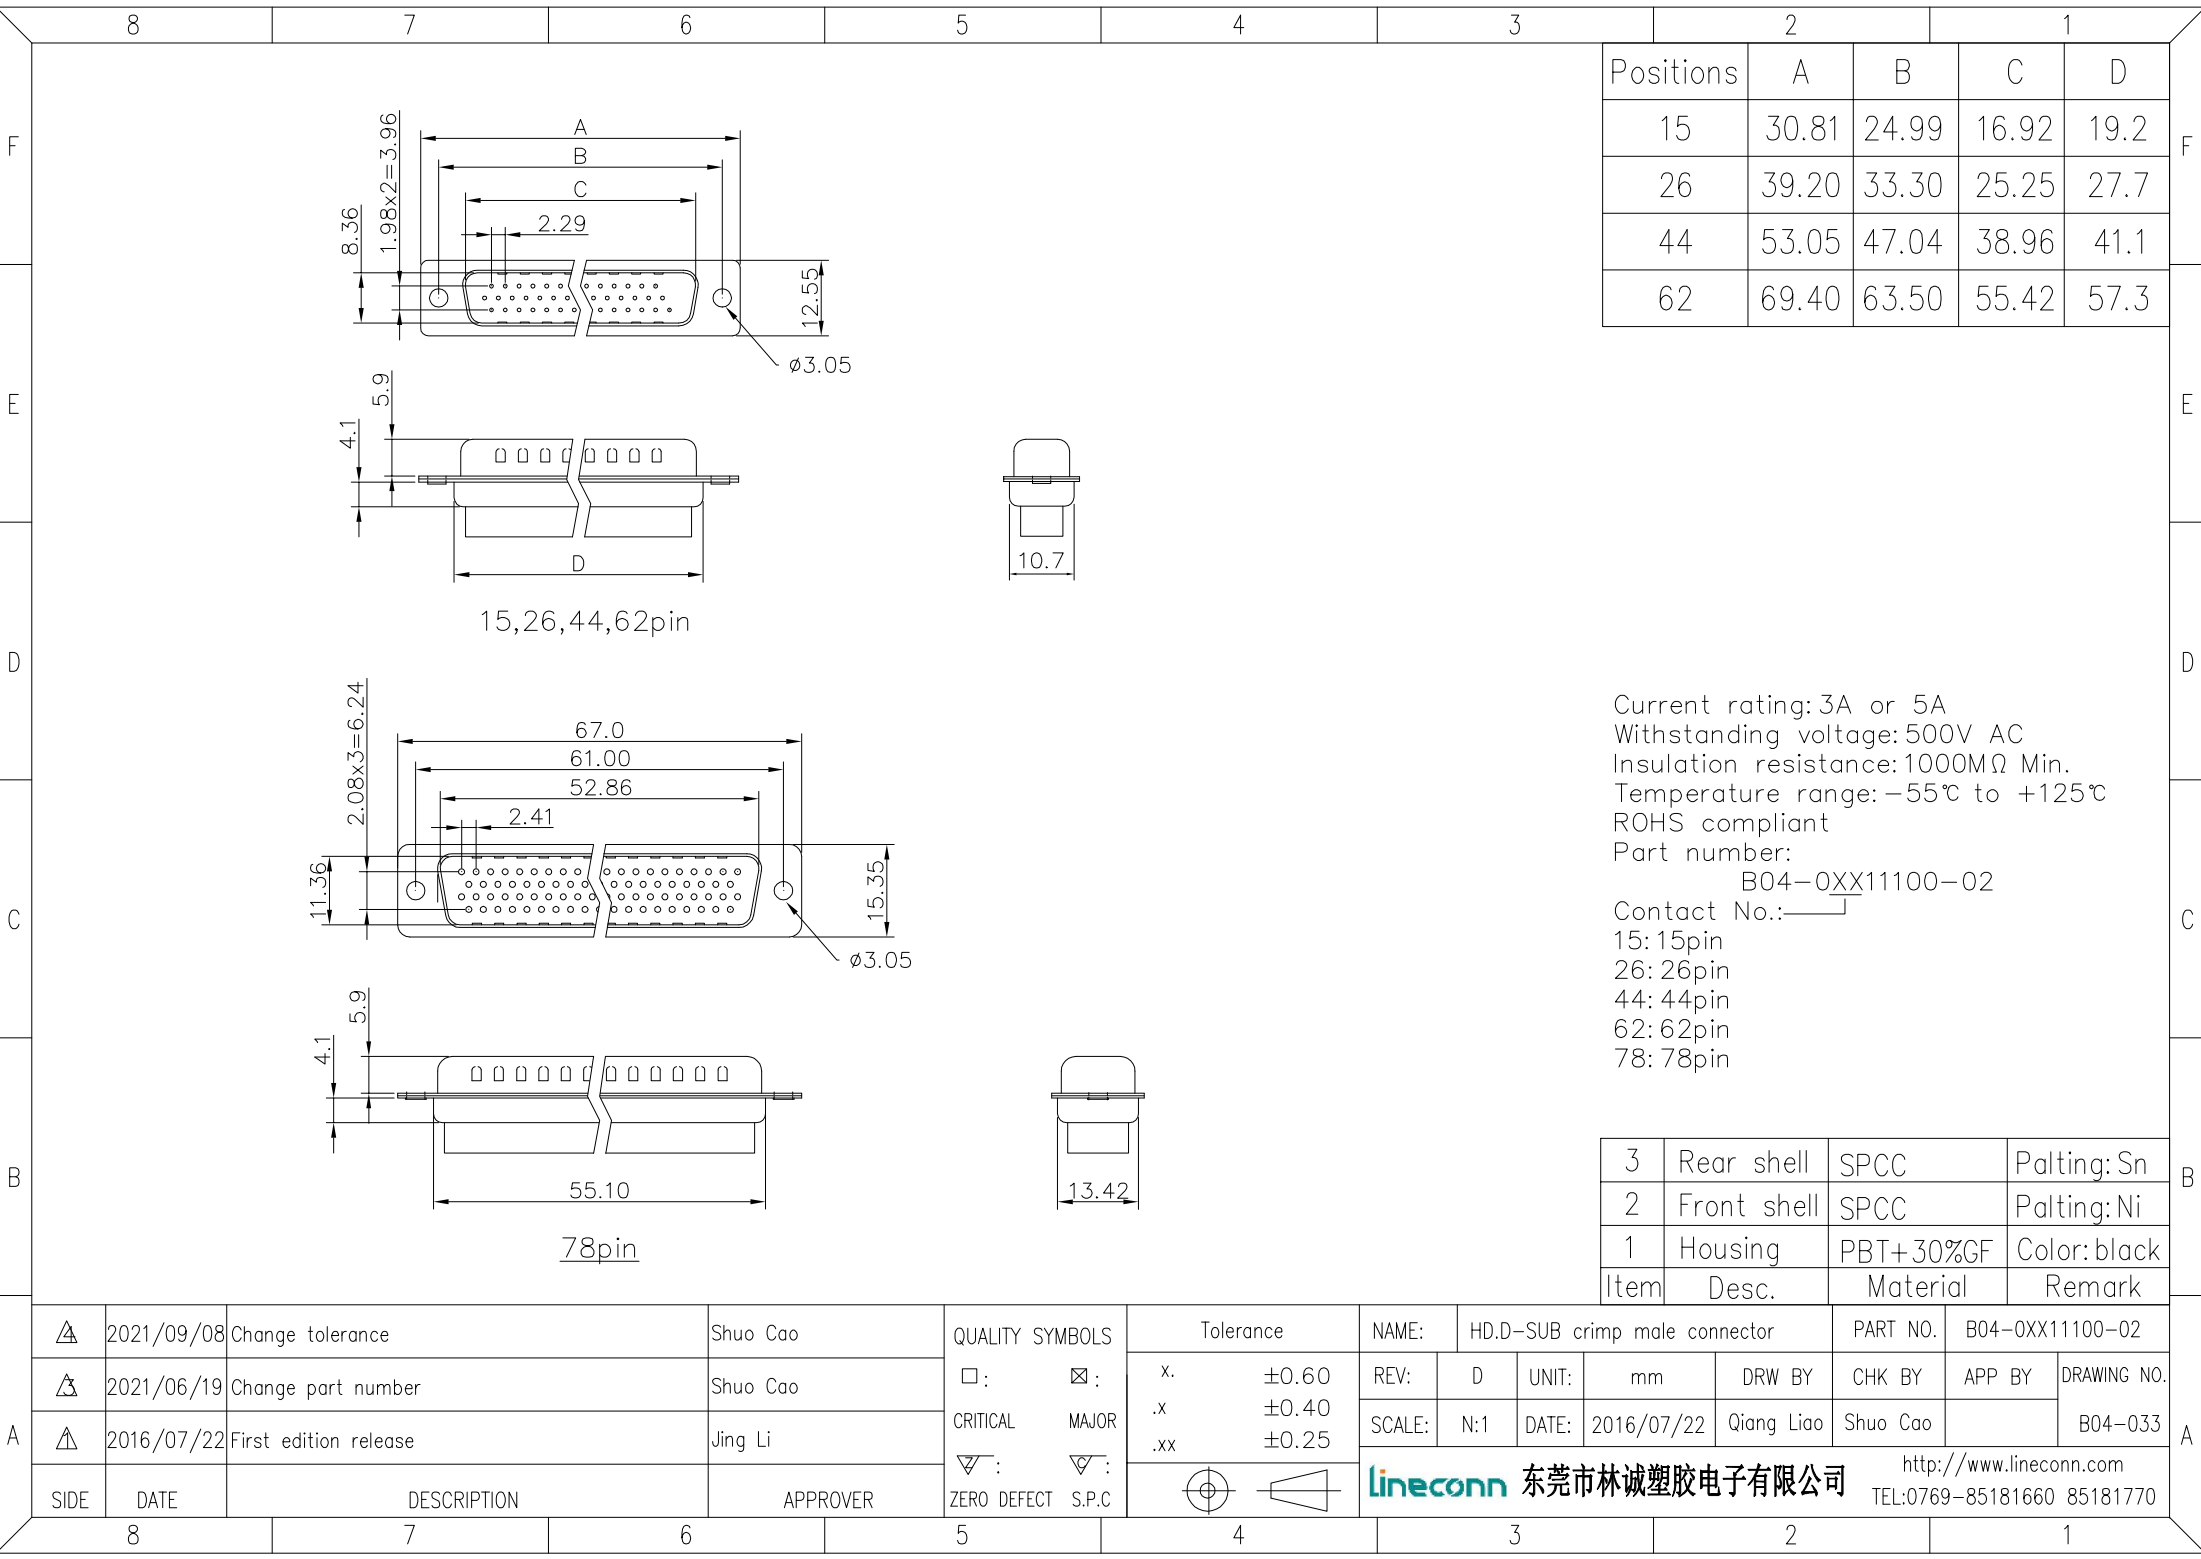

Positions	A	B	C	D
15	30.81	24.99	16.92	19.2
26	39.20	33.30	25.25	27.7
44	53.05	47.04	38.96	41.1
62	69.40	63.50	55.42	57.3

Current rating: 3A or 5A
Withstanding voltage: 500V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part number:
B04-0XX11100-02
Contact No.:
15: 15pin
26: 26pin
44: 44pin
62: 62pin
78: 78pin

3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Housing	PBT+30%GF	Color: black
Item	Desc.	Material	Remark

A	△	2021/09/08	Change tolerance	Shuo Cao	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:	HD.D-SUB crimp male connector				PART NO.	B04-0XX11100-02	
	△	2021/06/19	Change part number	Shuo Cao		x. ±0.60 .x ±0.40 .xx ±0.25  	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	△	2016/07/22	First edition release	Jing Li			SCALE:	N:1	DATE:	2016/07/22	Qiang Liao	Shuo Cao		B04-033	
							lineconn 东莞市林诚塑胶电子有限公司								http://www.lineconn.com
	SIDE	DATE	DESCRIPTION			APPROVER	ZERO DEFECT S.P.C		TEL:0769-85181660 85181770						
	8	7		6	5	4		3		2		1			