

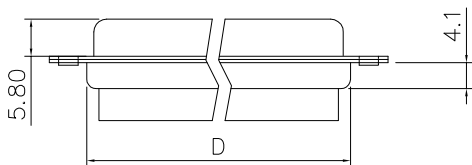
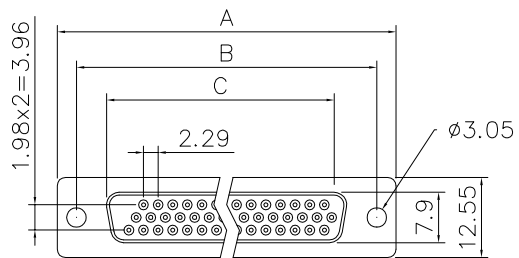
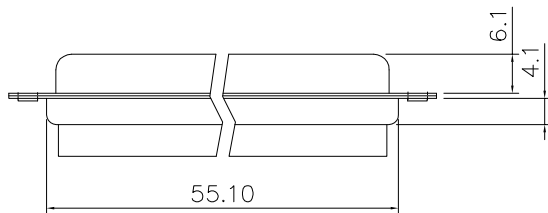



Pin No.	A	B	C	D
15	30.81	24.99	16.33	19.2
26	39.20	33.30	24.70	27.7
44	53.05	47.04	38.40	41.1
62	69.40	63.50	54.80	57.3

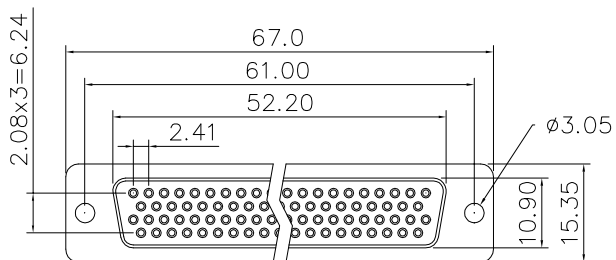

15,26,44,62pin



78pin



Current rating: 3A or 5A
Withstanding voltage: 500V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant

Part number:
B04-0XX21100-02

Pin No.:
15: 15pin
26: 26pin
44: 44pin
62: 62pin
78: 78pin

3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Housing	PBT+30%GF	Color: black
Item	Desc.	Material	Remark

	2020/11/03	Changed tolerance	Jack Chen	QUALITY SYMBOLS □: CRITICAL ▣: MAJOR ▽: ZERO DEFECT ▽: S.P.C	Tolerance x. ±0.60 .x ±0.40 .xx ±0.25 	NAME:		HD.D-SUB female crimp connector				PART NO.		B04-0XX21100-02	
	2020/06/11	Change part number	Jack Chen			REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	B04-034	
	2016/07/22	First edition release	Jing Li			SCALE:	N:1	DATE:	2016/07/22	Qiang Liao	Jack Chen				
SIDE	DATE	DESCRIPTION	APPROVER			lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
8		7		6		5		4		3		2		1	