

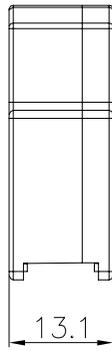
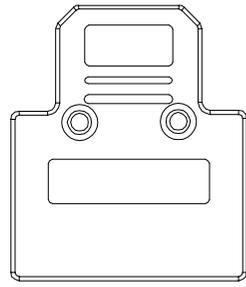
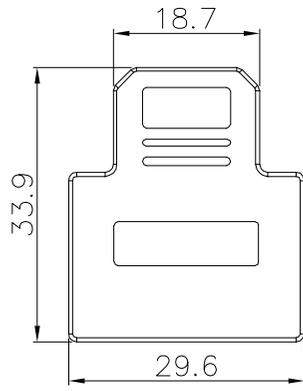



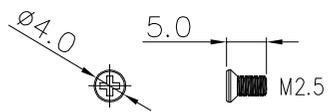




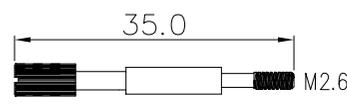


8 7 6 5 4 3 2 1



Contact current rating: 1 Amp
 Dielectric withstanding voltage: 500V AC
 Insulation resistance: 500MΩ Min.
 Contact resistance: 35mΩ Max
 Temperature range: -45°C to +105°C
 ROHS compliant
 Part number:

Solder area: B03-014318X7-70
 3: G/F
 C: Sn



9	Hood	Zinc alloy	Plating: Ni
8	35.0mm screw	Steel	Plating: Ni
7	6.0mm screw	Steel	Plating: Ni
6	5.0mm screw	Steel	Plating: Ni
5	Cable clip	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remark

△	2025/06/30	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance		NAME: SCSI 14pin male solder assembly zinc hood with screw		PART NO. B03-014318X7-70	
□:	☒:	x.	±0.60	REV:	A	UNIT:	mm
CRITICAL	MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2025/06/30
▽:	▽:	.xx	±0.25	DRW BY:	Yugong	CHK BY:	Carl Hu
ZERO DEFECT	S.P.C			APP BY:		DRAWING NO. B03-164	


东莞市林诚塑胶电子有限公司
<http://www.lineconn.com>
 TEL: 0769-85181660 85181770

8 7 6 5 4 3 2 1