

8 7 6 5 4 3 2 1

F

E

D

C

B

A

F













E

D

C

B




A

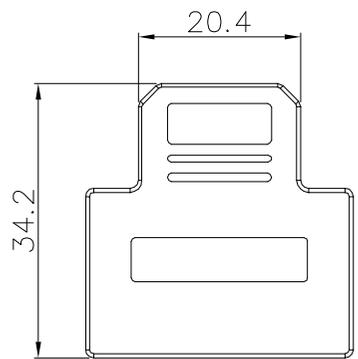

Contact current rating: 1 Amp
 Dielectric withstanding voltage: 500V AC
 Insulation resistance: 500M Ω Min.
 Contact resistance: 35m Ω Max
 Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
 ROHS compliant
 Part number:

B03-020318X7-70

Solder area:
 3: G/F
 C: Sn

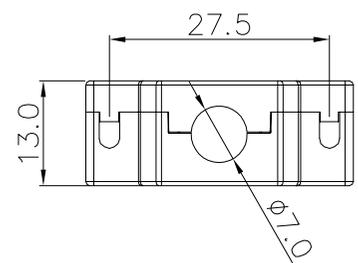

8	Hood	Zinc alloy	Plating: Ni
7	34.0mm screw	Steel	Plating: Ni
6	6.0mm screw	Steel	Plating: Ni
5	Cable clip	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	SCSI 20pin male solder assembly zinc hood with screw			PART NO.	B03-020318X7-70	
				<input type="checkbox"/> : <input checked="" type="checkbox"/> :	x. ± 0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY
\triangle	2025/06/30	First edition release	Carl Hu	CRITICAL MAJOR	.x ± 0.40	SCALE:	N:1	DATE:	2025/06/30	Yugong	Carl Hu	DRAWING NO.
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	.xx ± 0.25				lineconn 东莞市林诚塑胶电子有限公司			
8	7	6	5	4				http://www.lineconn.com				
									TEL:0769-85181660 85181770			

8 7 6 5 4 3 2 1