No.of contact	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.20
25	38.38	47.04	53.05

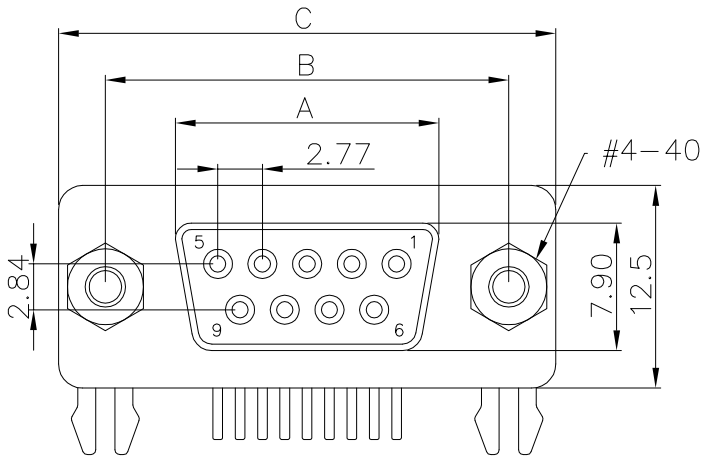

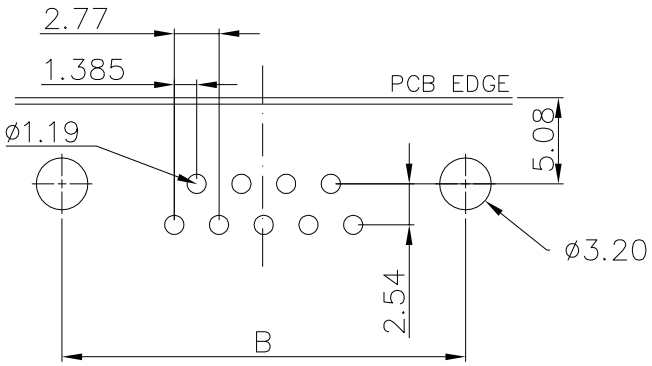

PCB layout

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: −45°C to +105°C
ROHS compliant

Part number:
B05−AXX611AD−F4
No.of contact:
09: 09pin
15: 15pin
25: 25pin

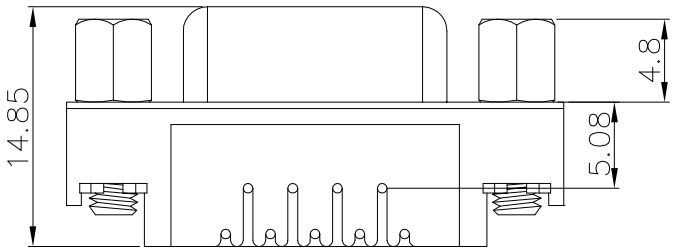

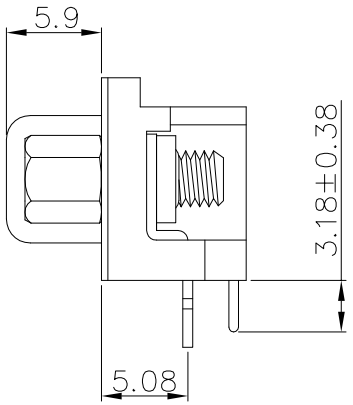

Item	Desc.	Material	Remark
6	Board lock	SPCC	Palting: Sn
5	Nut	Steel	Palting: Ni
4	Shell	SPCC	Palting: Ni
3	Cover	PBT+30%GF	Color: black
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under−plating: Ni

SIDE	DATE	DESCRIPTION	APPROVER
A	2024/05/18	First edition release	Jack Chen

QUALITY SYMBOLS
□: CRITICAL
⊠: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	D−SUB female right angle 5.08mm, riveting board lock,lock 4.8mm nut			PART NO.	B05−AXX611AD−F4		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2024/05/18	Huangmei	Jack Chen		B05−308

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769−85181660 85181770