


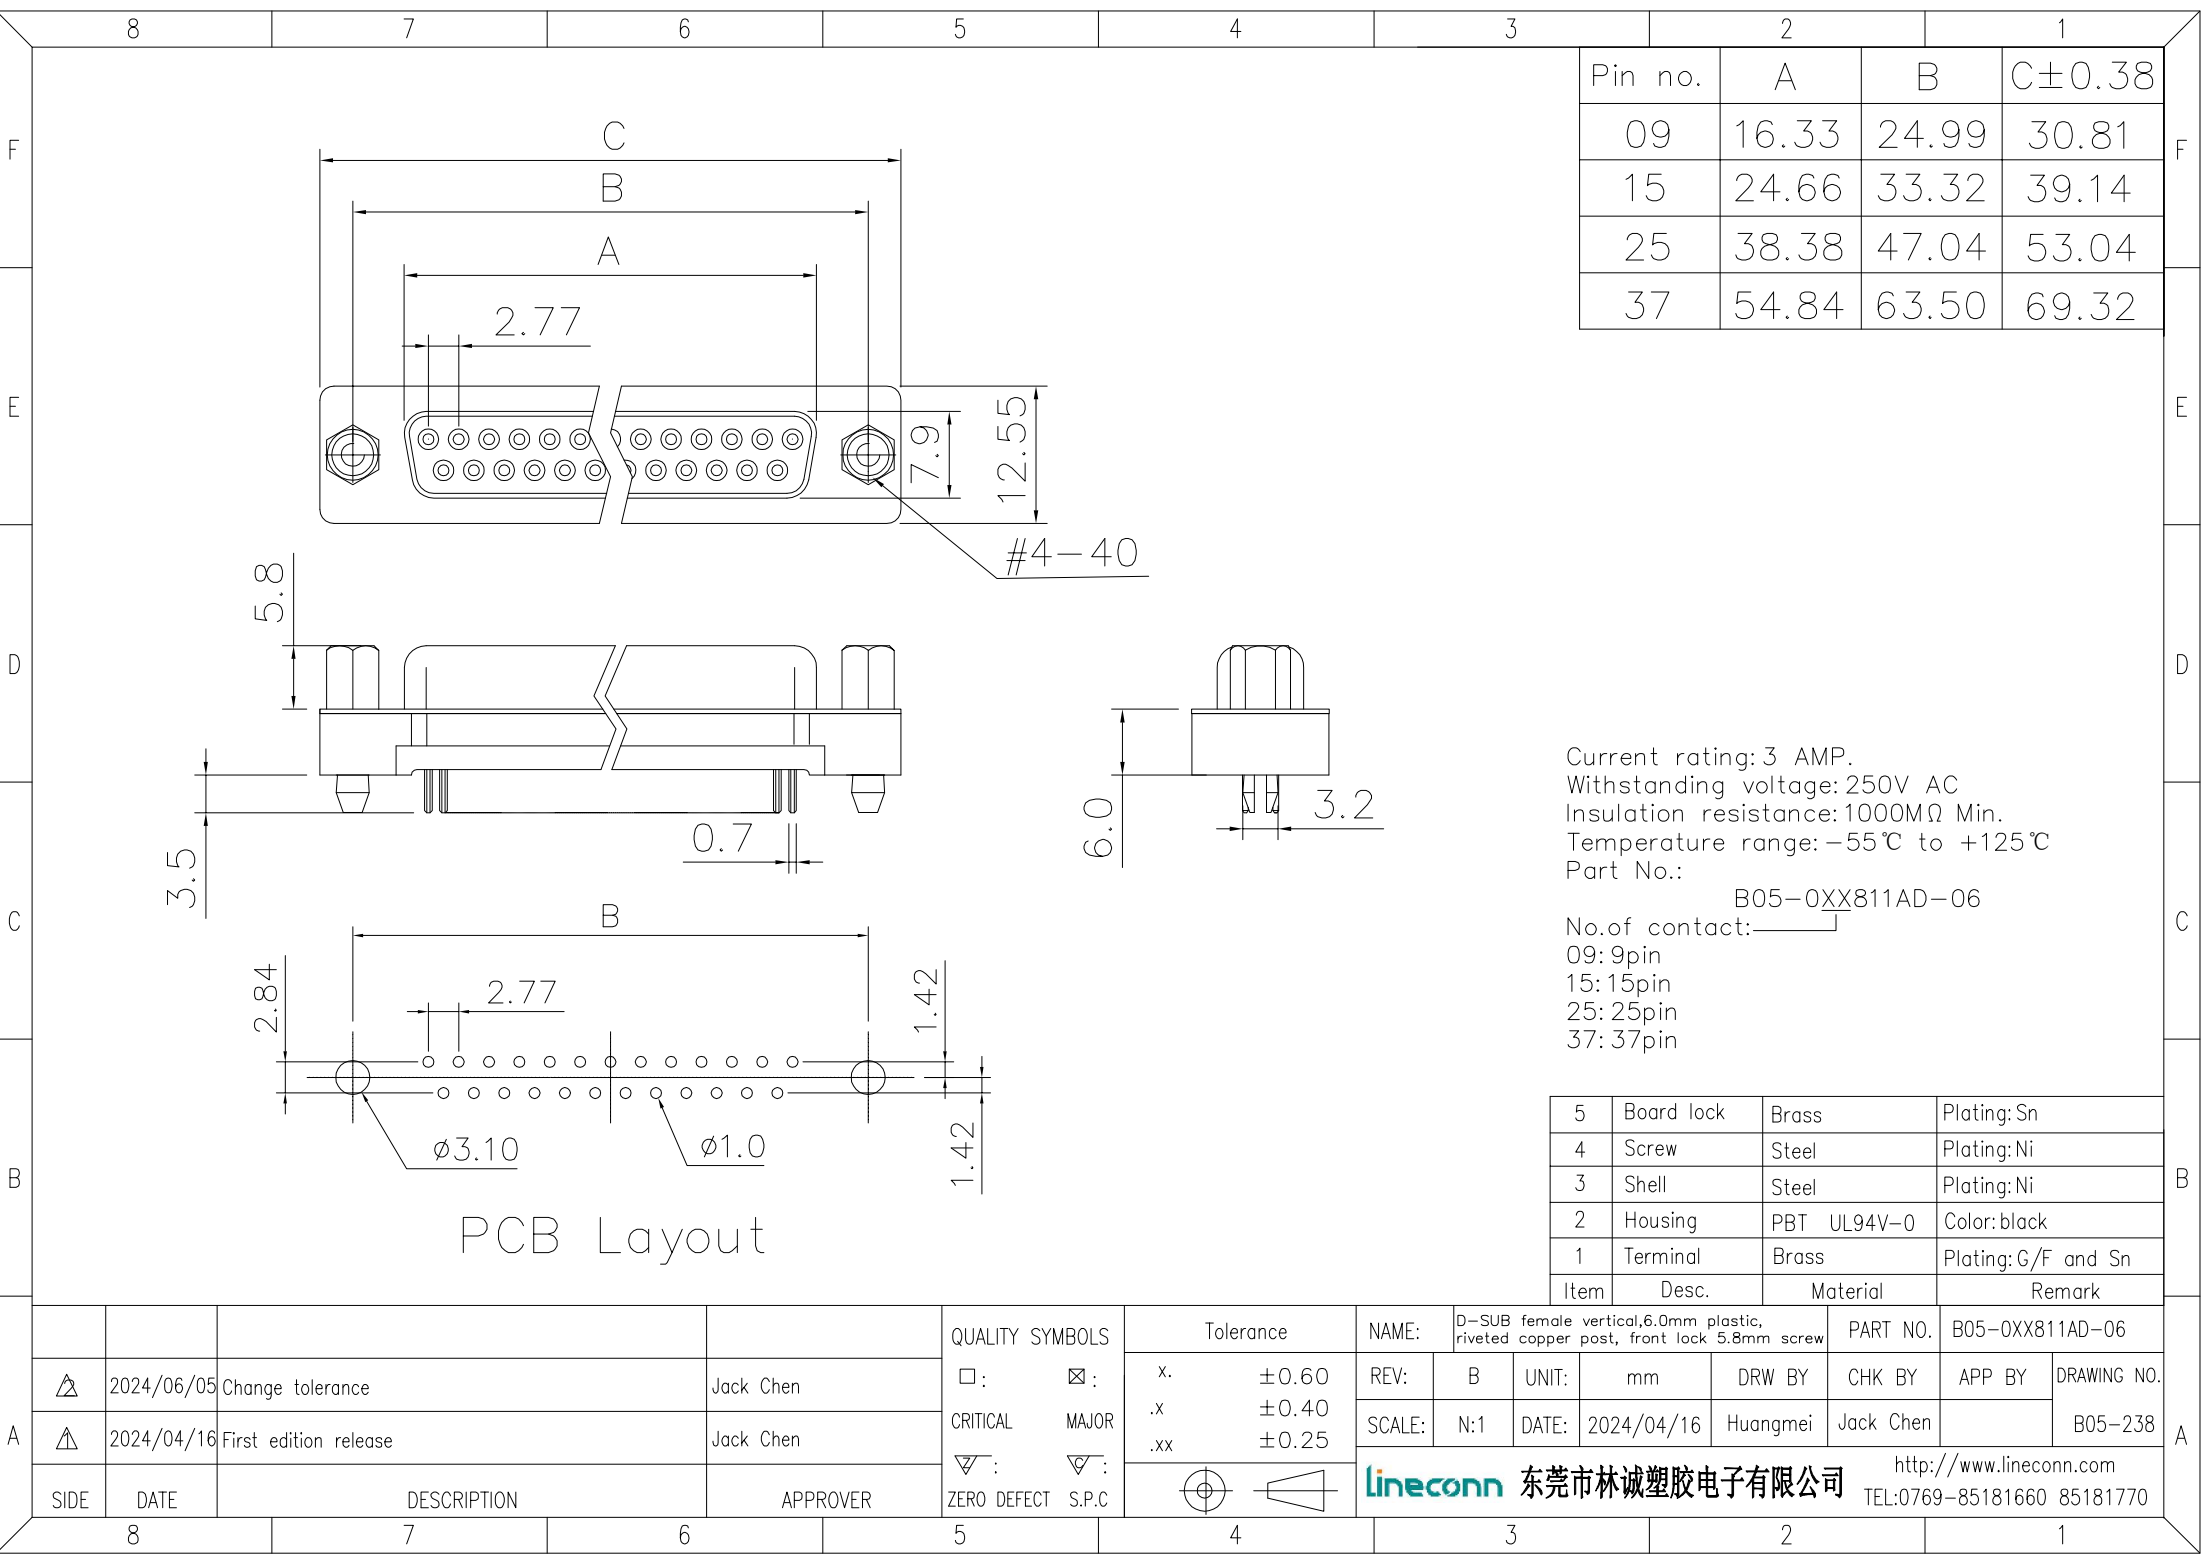

Pin no.	A	B	C±0.38
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

Current rating:3 AMP.
Withstanding voltage:250V AC
Insulation resistance:1000MΩ Min.
Temperature range:−55℃ to +125℃
Part No.:

B05-0XX811AD-06
No.of contact:_____
09: 9pin
15: 15pin
25: 25pin
37: 37pin

5	Board lock	Brass	Plating: Sn
4	Screw	Steel	Plating: Ni
3	Shell	Steel	Plating: Ni
2	Housing	PBT UL94V-0	Color: black
1	Terminal	Brass	Plating: G/F and Sn
Item	Desc.	Material	Remark

NAME: D-SUB female vertical,6.0mm plastic, riveted copper post, front lock 5.8mm screw				PART NO. B05-0XX811AD-06	
REV: B	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE: N:1	DATE: 2024/04/16	Huangmei	Jack Chen		B05-238
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770	

PCB Layout