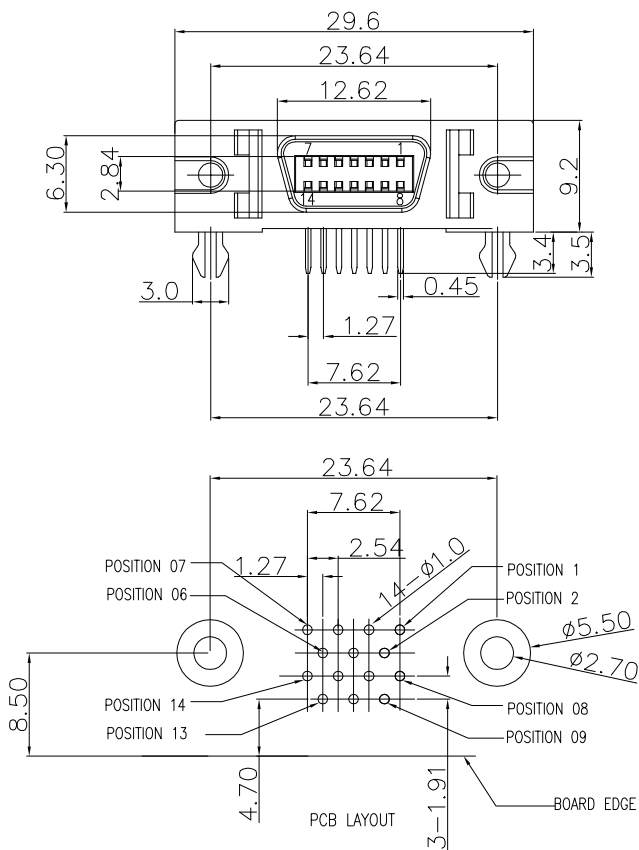
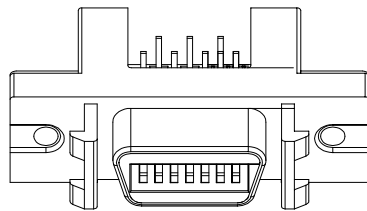
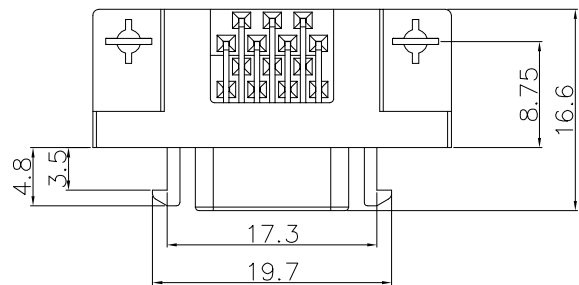


Voltage current rating:1 AMP.30V AC
Dielectric withstanding voltage:500V AC
Contact resistance:35 mΩ max.
Δ Insulation resistance:500MΩ min.
Temperature range:-45℃ to +125℃

5	Board lock	Copper alloy	Plating: Sn
4	Cover	LCP+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy T=0.3mm	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

Δ	2025/02/19	Change insulation resistance	Jack Chen
Δ	2021/04/05	Added dimensioning	Jack Chen
Δ	2015/04/09	First edition release	King Zhou

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25

NAME:	SCSI 14pin female right angle				PART NO.	B03-014618A7-01		
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2015/04/09	Huangmei	Jack Chen		B03-001	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770