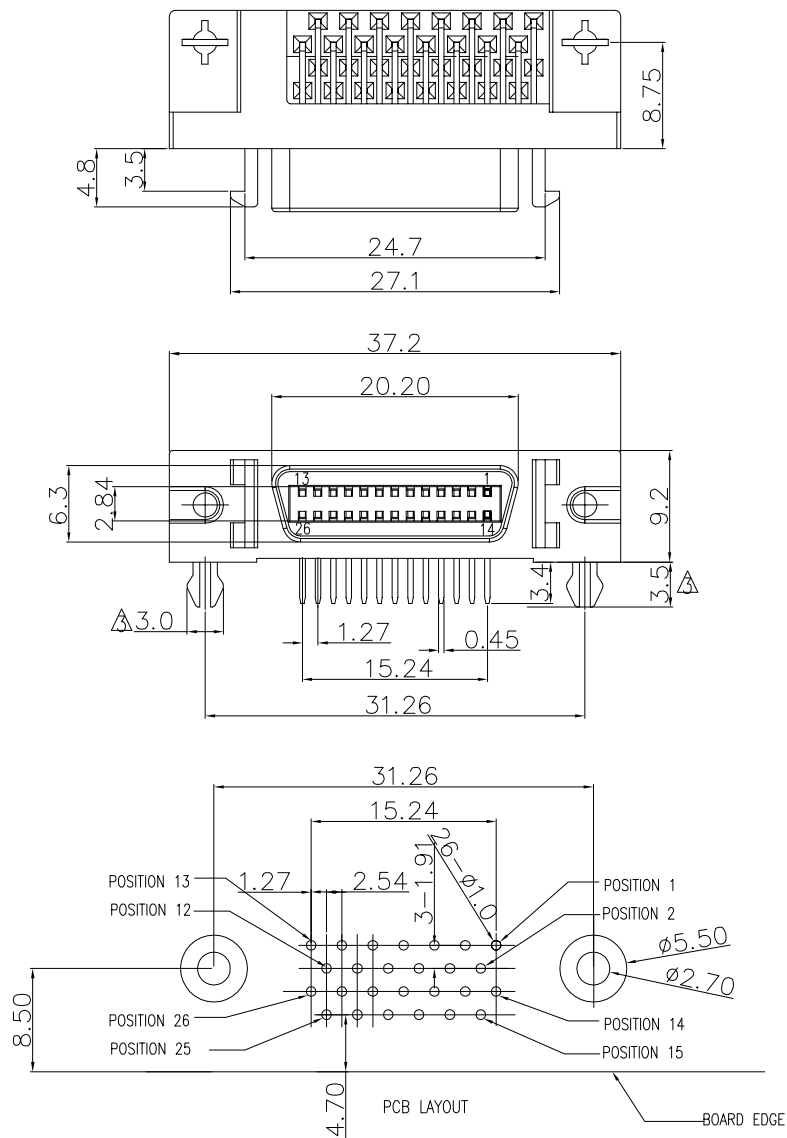



Voltage current rating:1 AMP.30V AC
Dielectric withstanding voltage:500V AC
Contact resistance:35 mΩ max.
△Insulation resistance:500MΩ min.
Temperature range:−45℃ to +125℃

5	Board lock	Copper alloy	Plating: Sn
4	Cover	LCP+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy T=0.3mm	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

	2025/02/19	Change insulation resistance	Jack Chen	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME:	SCSI 26pin female right angle				PART NO.	B03-026618A7-01	
	2023/05/17	Change tolerance	Jack Chen		x.	±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B03-003
	2015/04/09	First edition release	King Zhou		.x	±0.40	SCALE:	N:1	DATE:	2015/04/09	Huangmei	Jack Chen		
					.xx	±0.25								
SIDE	DATE	DESCRIPTION		APPROVER			lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			
8		7		6	5		4		3		2		1	