

PCB layout





Current rating: 1A  
 Withstanding voltage: 500V AC  
 Contact resistance : 35mΩ max.  
 Insulation resistance: 500MΩ Min.  
 Temperature range: -45°C to +105°C  
 ROHS compliant

3	Housing	PBT+G.F.30%	Color:black
2	Shell	SPCC	Plating:Ni
1	Terminal	Phosphor bronze	Contact area:Au 5u" Solder area:Sn Under-plating:Ni
Item	Desc.	Material	Remark

△	2021/07/04	Change part number	Carl Hu
△	2014/11/21	Change tolerance	King Zhou
△	2009/06/05	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□:	☒:	.x	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	SCSI(HPCN) 20pin male vertical for PCB			PART NO.	B03-020711EN-01		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2009/06/05	Yugong	Carl Hu		B03-048
				<b>东莞市林诚塑胶电子有限公司</b>			
				<a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770			
8	7	6	5	4	3	2	1

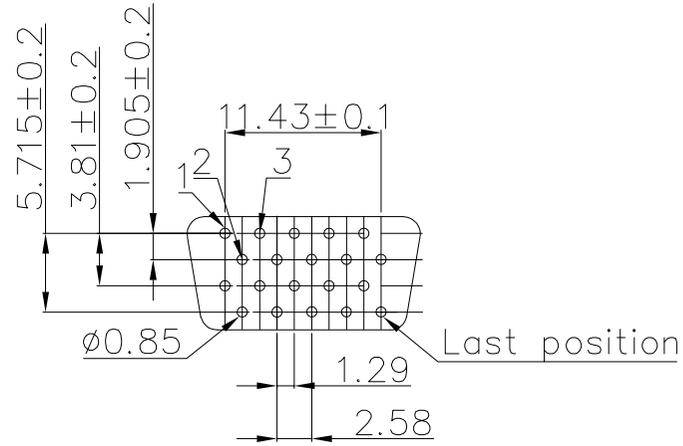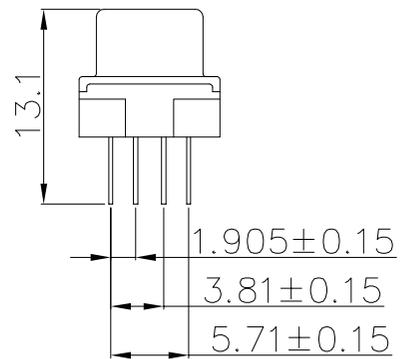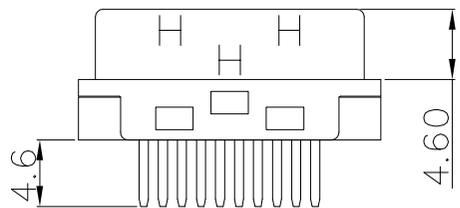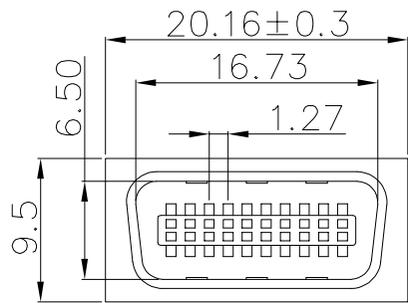

PCB layout

Current rating: 1A  
 Withstanding voltage: 500V AC  
 Contact resistance : 35mΩ max.  
 Insulation resistance: 500MΩ Min.  
 Temperature range: -45°C to +105°C  
 ROHS compliant

3	Housing	PBT+G.F.30%	Color:black
2	Shell	SPCC	Plating:Ni
1	Terminal	Phosphor bronze	Contact area:Au 5u" Solder area:Sn Under-plating:Ni
Item	Desc.	Material	Remark

△	2022/11/21	Change tolerance	Carl Hu
△	2020/07/19	Changed the part number	Shuo Cao
△	2016/04/09	First edition release	King Zhou

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽ :	▽ :	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	SCSI(HPCN) 20pin male vertical for PCB			PART NO.	B03-020711EN-A1		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2016/04/09	Yugong	Carl Hu		B03-136