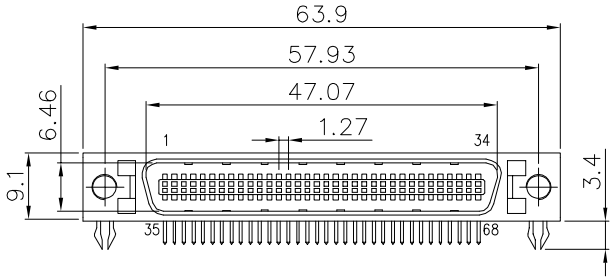

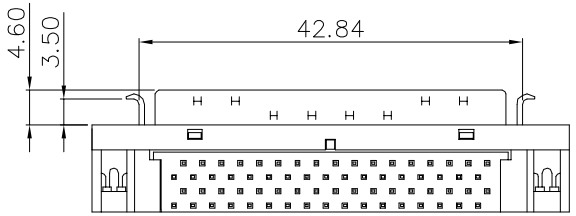

L type

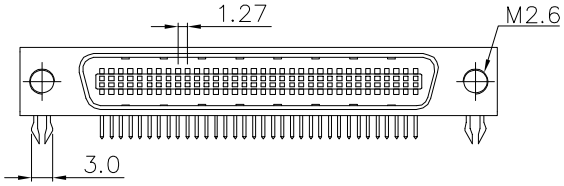

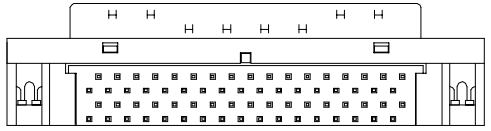

S type





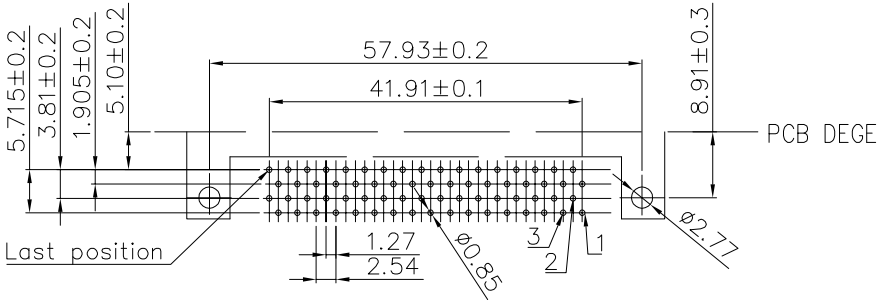

PCB layout

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistace: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: −45℃ to +105℃
ROHS compliant
Part number:
B03−068511EB−0X
Bracket finishes:
L: latch bracket
S: screw bracket

Item	Desc.	Material	Remark
6	Board lock	Copper alloy	Plating: Tin
5	Bracket	SPCC	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under−plating: Ni

SIDE	DATE	DESCRIPTION	APPROVER
3	2021/05/11	Changed the part number	Jack Chen
2	2015/09/17	Change tolerance	Jing Li
1	2015/06/03	First edition release	Jing Li

QUALITY SYMBOLS
□: CRITICAL
⊠: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	SCSI(HPCN) 68pin male right angle				PART NO.	B03−068511EB−0X	
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2015/06/03	John Liao	Jack Chen		B03−081

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769−85181660 85181770