

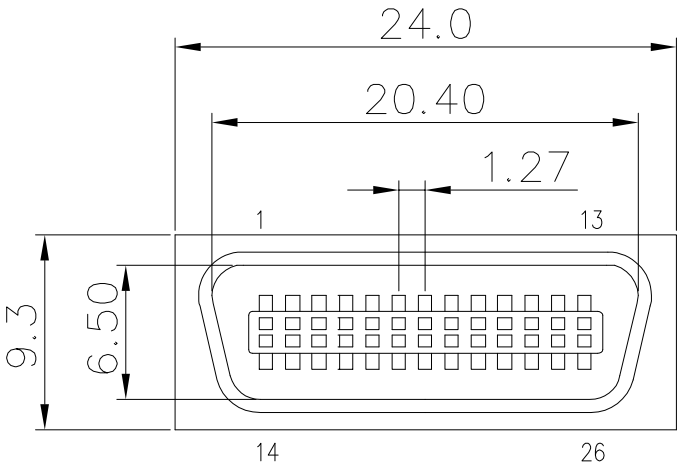




Current rating: 1A. 30V AC  
Insulation resistance: 500MΩ/Min  
Withstanding voltage: 500V AC/Min  
Contact resistance: 35mΩ Max  
Temperature range: -45℃ to +125℃  
ROHS compliant

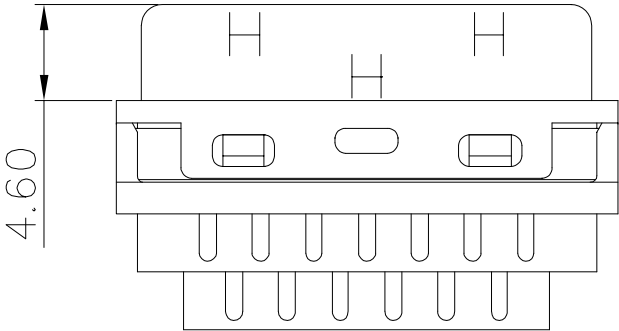

|      |          |                        |                                                              |
|------|----------|------------------------|--------------------------------------------------------------|
| 4    | Cover    | PBT+G.F.30% (UL 94V-0) | Color: black                                                 |
| 3    | Housing  | PBT+G.F.30% (UL 94V-0) | Color: black                                                 |
| 2    | Shell    | SPCC                   | Plating: Ni                                                  |
| 1    | Terminal | Phosphor bronze        | Contact area: Au 5u"<br>Solder area: Sn<br>Under-plating: Ni |
| Item | Desc.    | Material               | Remark                                                       |

|      |            |                       |           |
|------|------------|-----------------------|-----------|
| △    | 2021/09/24 | Change tolerance      | Carl Hu   |
| △    | 2021/05/07 | Change of part number | Jack Chen |
| △    | 2008/08/12 | First edition release | Fei Chen  |
| SIDE | DATE       | DESCRIPTION           | APPROVER  |

|                 |       |           |  |
|-----------------|-------|-----------|--|
| QUALITY SYMBOLS |       | Tolerance |  |
| □:              | ☒:    | x. ±0.60  |  |
| CRITICAL        | MAJOR | .x ±0.40  |  |
| ▽:              | ▽:    | .xx ±0.25 |  |
| ZERO DEFECT     | S.P.C |           |  |

|                        |     |                                                 |            |        |                                                       |                 |             |
|------------------------|-----|-------------------------------------------------|------------|--------|-------------------------------------------------------|-----------------|-------------|
| NAME:                  |     | SCSI(HPCN) 26pin male solder assembly connector |            |        | PART NO.                                              | B03-026311E0-01 |             |
| REV:                   | E   | UNIT:                                           | mm         | DRW BY | CHK BY                                                | APP BY          | DRAWING NO. |
| SCALE:                 | N:1 | DATE:                                           | 2008/08/12 | Yugong | Carl Hu                                               |                 | B03-054     |
| lineconn 东莞市林诚塑胶电子有限公司 |     |                                                 |            |        | http://www.lineconn.com<br>TEL:0769-85181660 85181770 |                 |             |