

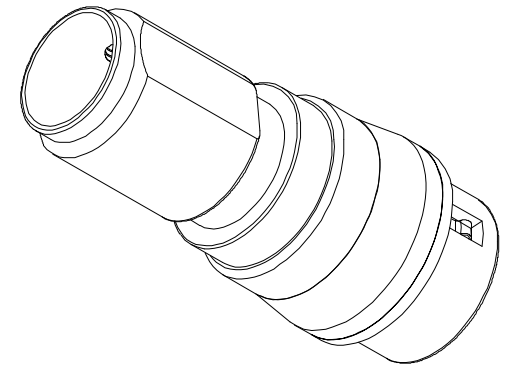
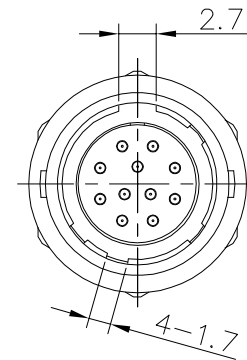
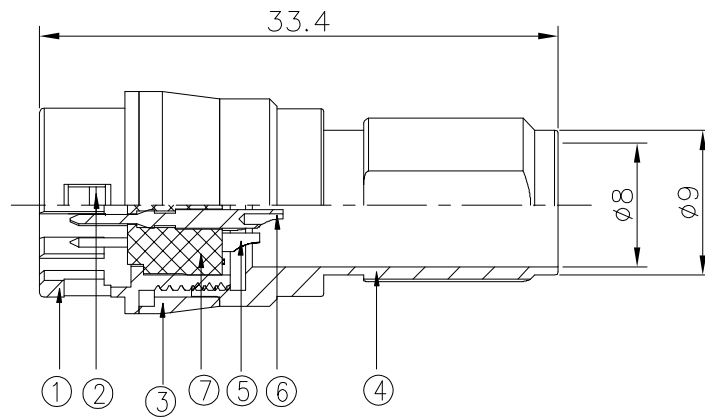




Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 1000 cycles
Temperature range: -25℃ to +85℃
ROHS compliant
Waterproof rating: IP67

8	Casing	Rubber	Color: black
7	Housing	PPS	Color: black
6	Terminal	Copper	Plating: Au
5	Terminal	Copper	Plating: Au
4	Cable sleeve	Copper	Plating: Ni
3	Connecting sleeve	Copper	Plating: Ni
2	Spring	QBe1.9	
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

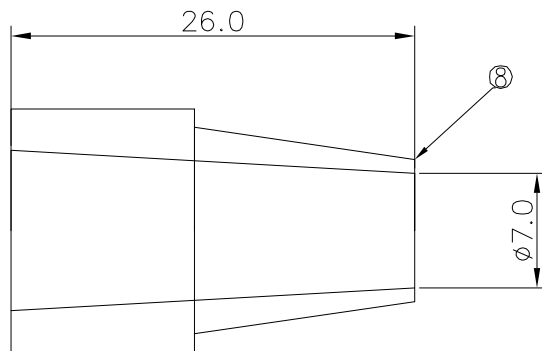

△	2023/03/09	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
 	

NAME:	HR10A-10J-12P male solder assembly				PART NO.	B10-02PZ12SH-ZFD		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2023/03/09	Yugong	Carl Hu		B10-165	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			